

QUICKTRONIC® INSTANT START for T8-fluorescent lamps



QTIS e 1x18, 30, 36, 58



QTIS e 2x18, 36, 58



QTIS e 3x/4x18, 3x36

Your advantages:

- 30,000 hours lifetime*
- $t_c = 70^\circ\text{C}$
- Instant start within 0.3 seconds
- Flickerfree HF light
- Reliable lamp ignition in between $t_a = -15^\circ\text{C} \dots +50^\circ\text{C}$
- EEI = A3
- Suitable for luminaires of protection class I
- Automatic safety shut down at lamp failure
- Automatic restart after lamp replacement
- CW terminals for manual and robot wiring

* max. failure rate of 10%


QUICKTRONIC® INSTANT START for T8-fluorescent lamps

Instant start standard T8 ECG for continuous lighting.

SEE THE WORLD IN A NEW LIGHT



TECHNICAL DATA

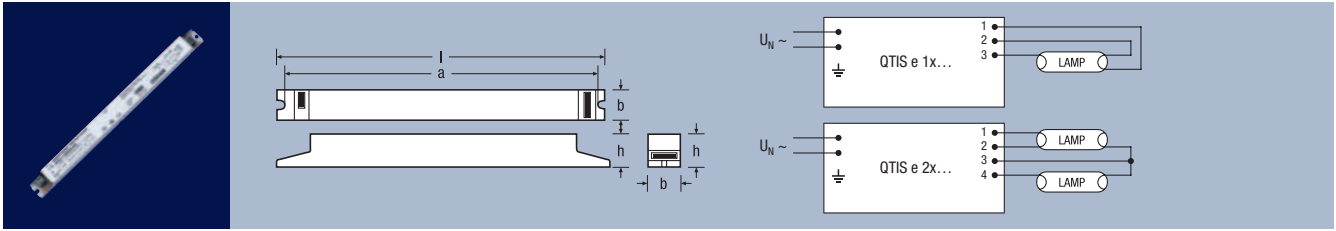

Product reference	Product number															
-------------------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--


QUICKTRONIC® INSTANT START – single-lamp application

NEW

QTIS e 1x18/220-240	4050300775388	1xL 18	198...254	45...50	0.09	0.94	18	16	1300	-15...+50	360	30	30	350	20	250
QTIS e 1x30/220-240	4008321200143	1xL 30	198...254	45...50	0.26	0.97	28	24	1900	-15...+50	360	30	30	350	20	300
QTIS e 1x36/220-240	4050300940649	1xL 36	198...264	45...50	0.16	0.95	36	32	3200	-15...+50	360	30	30	350	20	300
QTIS e 1x58/220-240	4050300940625	1xL 58	198...264	45...50	0.24	0.95	56	50	5000	-15...+50	360	30	30	350	20	315

QUICKTRONIC® INSTANT START – double-lamp application

QTIS e 2x18/220-240	4050300775401	2xL 18	198...254	45...50	0.16	0.96	36	32	2x1300	-15...+50	360	30	30	350	20	360
QTIS e 2x36/220-240	4050300940663	2xL 36	198...264	45...50	0.30	0.95	70	64	2x3200	-15...+50	360	30	30	350	20	315
QTIS e 2x58/220-240	4050300940618	2xL 58	198...264	45...50	0.47	0.95	110	100	2x5000	-15...+50	360	30	30	350	20	360

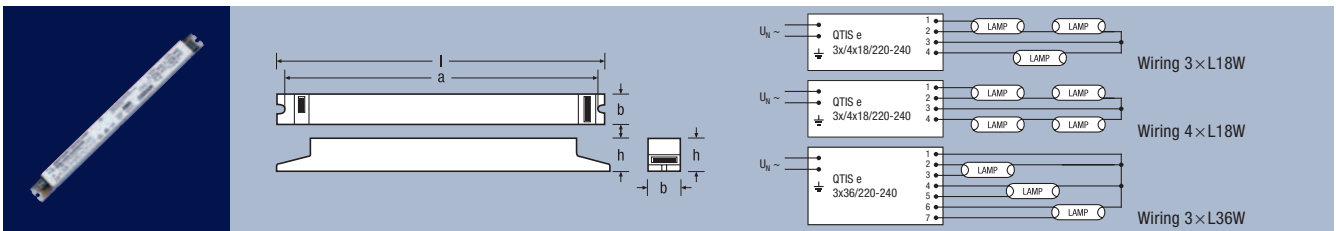

Product reference	Product number															
-------------------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

QUICKTRONIC® INSTANT START – 3- and 4-lamp application

QTIS e 3x/4x18/220-240	4050300940670	3xL 18	198...264	45...50	0.29	0.95	63	56	3x1500	-15...+50	360	30	30	350	20	360
		4xL 18			0.32											
QTIS e 3x36/220-240 CW	4008321104687	3xL 36	198...264	35...40	0.44	0.95	99	90	3x3000	-15...+50	423	40	30	415	20	440



OSRAM System® Guarantee

OSRAM offers a full three-year guarantee on selected electronic control gears. The guarantee starts when the relevant luminaire with the appropriate OSRAM ECG is first put into operation. For more information go to www.osram.com/system-guarantee.

SEE THE WORLD IN A NEW LIGHT

