



QUICKTRONIC® PROFESSIONAL



QTP-D/E 1x10-13



QTP-T/E 2x18

Your benefits:

- Better thermal behavior for even more compact luminaires: $t_c = 75^\circ\text{C}$
- Separate installation with optional cable clamp for K2 and K3 housings
- New housing with standard dimensions optimized for cable clamp
- Improved RI suppression (EMC) thanks to additional terminal for function ground
- Simplified luminaire approval for luminaires already VDE approved
- Highly reliable end-of-life safety shutdown as per Test 2
- OSRAM DULUX® S/E 9 W also ENEC-certified for QTP-D/E 1x10-13 and 2x10-13

Applications:

- New creative and economical luminaire solutions for small spaces
- Modern compact downlights for foyers, offices, retail outlets and exhibition rooms




QUICKTRONIC® PROFESSIONAL QTP-D/E, -T/E Electronic control gear

The new generation of ECGs for compact fluorescent lamps – the innovative partner for all OSRAM DULUX® S/E, OSRAM DULUX® D/E and OSRAM DULUX® T/E lamps from 9 to 18 W.



TECHNICAL DATA

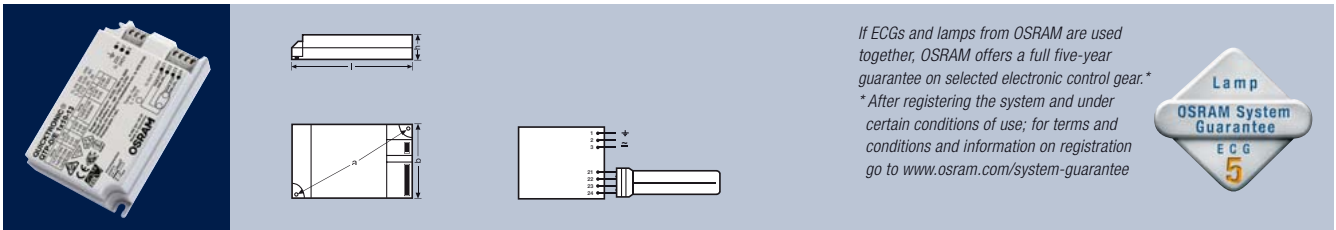


If ECGs and lamps from OSRAM are used together, OSRAM offers a full five-year guarantee on selected electronic control gear.*
* After registering the system and under certain conditions of use; for terms and conditions and information on registration go to www.osram.com/system-guarantee



Product-reference	Product-number								
OSRAM QUICKTRONIC® for compact fluorescent lamps – single-lamp version									
QTP-D/E 1x10-13/220-240	4008321 181572	1xDS/E 9	198...264	approx. 44	0.05	0.92 c			
		1xDD/E 10				0.95			
		1xDS/E 11				0.95			
		1xDD/E 13, DT/E 13				0.95			
QTP-T/E 1x18/220-240	4008321 181701	1xDD/E 18, DT/E 18	198...264	approx. 44	0.08	0.99			
Product-reference									
QTP-D/E 1x10-13/220-240	9.5	1x600	-20...+50	93	58	29	96	20	95
	11.5	1x600							
	11.5	1x900							
	15.5	1x900							
QTP-T/E 1x18/220-240	20	1x1200	-20 ²⁾ ...+50	103	67	31	110	20	125

¹⁾ Line voltage, sinusoidal
²⁾ Amalgam lamps, e.g. OSRAM DULUX® T/E...LN, are suitable, with restrictions, for outdoor lighting

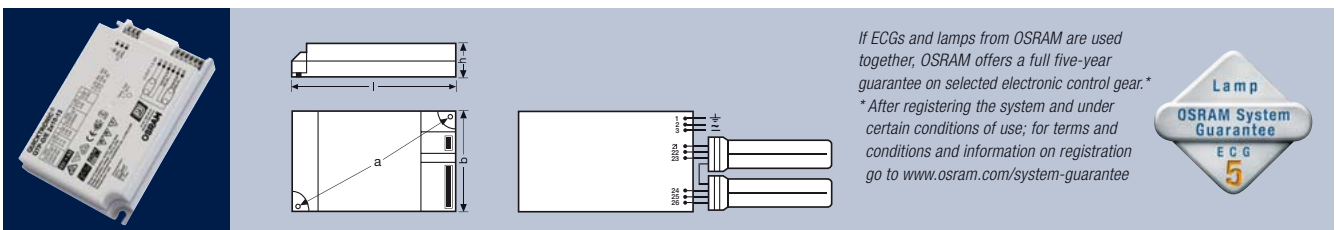

If ECGs and lamps from OSRAM are used together, OSRAM offers a full five-year guarantee on selected electronic control gear.*
* After registering the system and under certain conditions of use; for terms and conditions and information on registration go to www.osram.com/system-guarantee



Product-reference	Produkt-number								
OSRAM QUICKTRONIC® for compact fluorescent lamps – two-lamp version									
QTP-D/E 2x10-13/220-240	4008321 181596	2xDS/E 9	198...264	approx. 44	0.09	0.92 c			
		2xDD/E 10				0.95			
		2xDS/E 11				0.95			
		2xDD/E 13, DT/E 13				0.99			
QTP-T/E 2x18/220-240	4008321 181619	2xDD/E 18, DT/E 18	198...264	approx. 44	0.17	0.99			
Product-reference									
QTP-D/E 2x10-13/220-240	18	2x600	-20...+50	123	79	33	129.5	20	170
	21	2x600							
	27	2x900							
	29	2x900							
QTP-T/E 2x18/220-240	36	2x1200	-20 ²⁾ ...+50	123	79	33	129.5	20	170

¹⁾ Line voltage, sinusoidal
²⁾ Amalgam lamps, e.g. OSRAM DULUX® T/E...LN, are suitable, with restrictions, for outdoor lighting