



DALI® MULTleco



MULTleco

General benefits:

- Standby consumption < 0,5W
- Light and presence sensors for installation in luminaires and ceilings
- Luminaire integration or independent mounting with ECO CI KIT
- Control of up to 6 ECGs
- Extremely compact dimensions
- Applications: e. g. offices, corridors, toilets and recreation rooms

DALI® MULTleco:

- Up to 70 % energy savings compared with conventional solutions
- 14 different operating modes can be set via DIP switches for:
 - daylight-dependent **regulation**
 - presence-dependent **control**


MULTleco:

- Up to 50 % energy savings compared with conventional solutions
- 8 different operating modes can be set via DIP switches for:
 - daylight-dependent **switching**
 - presence-dependent **switching**

DALI® MULTleco and MULTleco

Extremely compact, energy-saving and versatile – lighting controls for dimmable and switchable luminaires.

TECHNICAL DATA

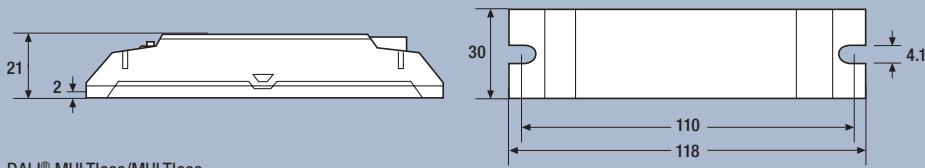


DALI® MULTleco/MULTleco

Dimensions in mm

Product reference	DALI® MULTleco	MULTleco	ECO CI KIT
Product number (EAN)	4008321371300	4008321405302	4008321392091
Control output	DALI	Switching contact	—
Operating voltage	100...240 V	100...240 V	—
Power consumption	< 1 W	< 1 W	—
Type of protection	IP20	IP20	—
Protection class	II	II	—
Dimensions in mm	118 × 30 × 21	118 × 30 × 21	140 × 33 × 23 *


* Overall dimensions for mounting on control unit

System overview with sensors

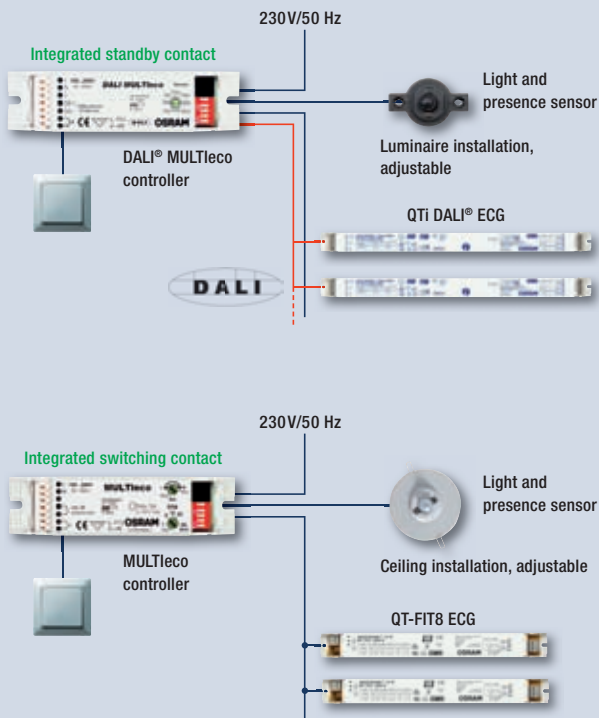

DALI® MULTleco and MULTleco meet the Swiss MINergie guidelines and the EU Ecodesign specifications planned for 2012.

ECO CI KIT

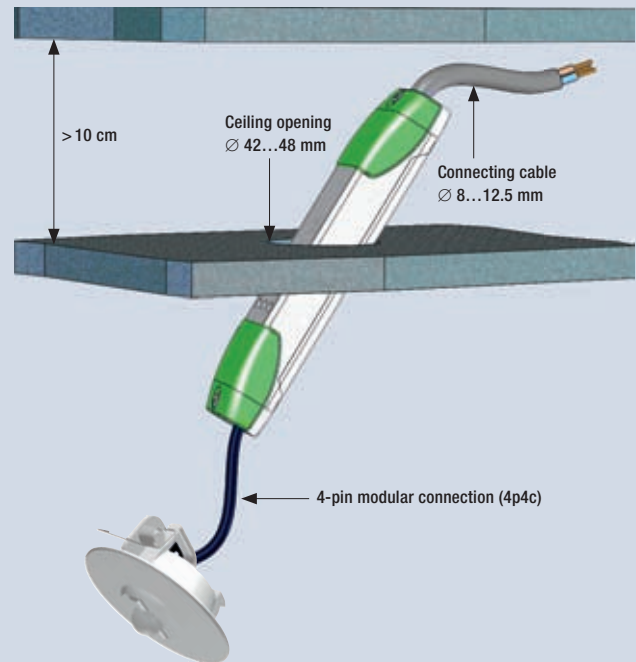

Also suitable for independent mounting with the ECO CI KIT.

For more information go to: www.osram.com/ecg-lms

member of
voltimum
.com

SEE THE WORLD IN A NEW LIGHT

OSRAM OSRAM