
Product family datasheet

HALOLINE PRO

Double ended halogen lamps with tube base



Product family datasheet

Technical data

Product description	Electrical data	Photometrical data	Dimensions & weight		Additional product data		Certificates & standards
	Claimed equiv. conventional lamp power	Light color (designation)	Overall length	Product weight	Mercury-free	Product remark	Energy efficiency class
HALOLINE PRO 48 W 230 V R7S ¹⁾	60 W	Warm White	74.90 mm	5.5 g	Yes	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 For outdoor applications and operation in damp locations special approved fixtures are required Technical and light values are subject to be changed	G
HALOLINE PRO 80 W 230 V R7S ²⁾	100 W	Warm White	74.90 mm	5.6 g	Yes	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 For outdoor applications and operation in damp locations special approved fixtures are required	G

Product family datasheet

Product description	Electrical data	Photometrical data	Dimensions & weight		Additional product data		Certificates & standards
	Claimed equiv. conventional lamp power	Light color (designation)	Overall length	Product weight	Mercury-free	Product remark	Energy efficiency class
HALOLINE PRO 120 W 230 V R7S ²⁾	150 W	Warm White	74.90 mm	5.5 g	Yes	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 For outdoor applications and operation in damp locations special approved fixtures are required	G
HALOLINE PRO 120 W 230 V R7S ¹⁾	150 W	Warm White	114.20 mm	7.5 g	Yes	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 For outdoor applications and operation in damp locations special approved fixtures are required Technical and light values are subject to be changed	G
		Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)					
Product description	Energy consumption	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database			
HALOLINE PRO 48 W 230 V R7S ¹⁾	48.00 kWh/1000h	18-04-2022	4008321977595	In work			


Product family datasheet

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006
(REACH)

Product description	Energy consumption	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
HALOLINE PRO 80 W 230 V R7S ²⁾	80.00 kWh/1000h	18-04-2022	4008321928078	In work
HALOLINE PRO 120 W 230 V R7S ²⁾	120.00 kWh/1000h	18-04-2022	4008321928092	In work
HALOLINE PRO 120 W 230 V R7S ¹⁾	120.00 kWh/1000h	18-04-2022	4008321977670	In work

¹⁾ Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required/Technical and light values are subject to be changed


²⁾ Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required



HALOLINE PRO 48 W 230 V R7S



HALOLINE PRO 80 W 230 V R7S,
 HALOLINE PRO 120 W 230 V R7S,
 HALOLINE PRO 120 W 230 V R7S

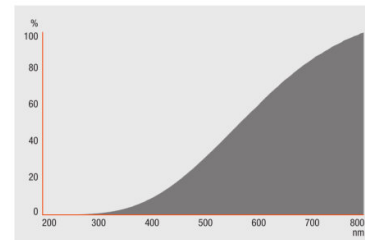

HALOLINE PRO 48 W 230 V R7S,
 HALOLINE PRO 80 W 230 V R7S,
 HALOLINE PRO 120 W 230 V R7S,
 HALOLINE PRO 120 W 230 V R7S

Product family datasheet

Application advice

For more detailed application information and graphics please see product datasheet.

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321977595	HALOLINE PRO 48 W 230 V R7S	Shipping carton box 20	92 mm x 77 mm x 113 mm	0.80 dm ³	197.00 g
4008321928078	HALOLINE PRO 80 W 230 V R7S	Shipping carton box 20	92 mm x 112 mm x 77 mm	0.79 dm ³	209.00 g
4008321928092	HALOLINE PRO 120 W 230 V R7S	Shipping carton box 20	93 mm x 77 mm x 113 mm	0.81 dm ³	207.00 g
4008321977670	HALOLINE PRO 120 W 230 V R7S	Shipping carton box 20	137 mm x 77 mm x 112 mm	1.18 dm ³	301.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany