

---

# Product family datasheet

## HALOLINE PRO

Double ended halogen lamps with tube base



## Product family datasheet


### Technical data

| Product description                        | Certificates & standards | Environmental information<br>Information according Art. 33 of EU Regulation (EC) 1907/2006<br>(REACH) |                            |                                  |
|--|--------------------------|---|----------------------------|----------------------------------|
|  | Energy efficiency class  | Date of Declaration   | Primary Article Identifier | Declaration No. in SCIP database |
| HALOLINE PRO 48 W 230 V R7S <sup>1)</sup>  | G                        | 18-04-2022  | 4008321977595              | In work                          |
| HALOLINE PRO 80 W 230 V R7S <sup>2)</sup>  | G                        | 18-04-2022  | 4008321928078              | In work                          |
| HALOLINE PRO 120 W 230 V R7S <sup>2)</sup> | G                        | 18-04-2022  | 4008321928092              | In work                          |
| HALOLINE PRO 120 W 230 V R7S <sup>1)</sup> | G                        | 18-04-2022  | 4008321977670              | In work                          |
| HALOLINE PRO 230 W 230 V R7S <sup>2)</sup> | G                        | 18-04-2022  | 4008321207692              | In work                          |
| HALOLINE PRO 400 W 230 V R7S <sup>2)</sup> | G                        | 18-04-2022  | 4008321207715              | In work                          |

<sup>1)</sup> Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required/Technical and light values are subject to be changed

<sup>2)</sup> Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

## Product family datasheet

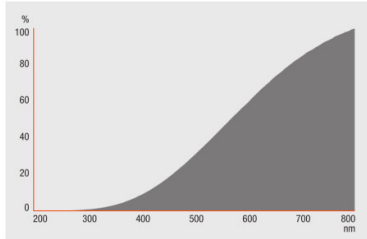

---

— HALOLINE PRO 48 W 230 V R7S,  
HALOLINE PRO 80 W 230 V R7S,  
HALOLINE PRO 120 W 230 V R7S,  
HALOLINE PRO 120 W 230 V R7S,  
HALOLINE PRO 230 W 230 V R7S,  
HALOLINE PRO 400 W 230 V R7S

---

### Application advice

For more detailed application information and graphics please see product datasheet.

## Product family datasheet

### Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistical Data

| Product code  | Product description          | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume               | Gross weight |
|---------------|------------------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4008321977595 | HALOLINE PRO 48 W 230 V R7S  | Shipping carton box<br>20    | 92 mm x 77 mm x 113 mm               | 0.80 dm <sup>3</sup> | 197.00 g     |
| 4008321928078 | HALOLINE PRO 80 W 230 V R7S  | Shipping carton box<br>20    | 112 mm x 77 mm x 92 mm               | 0.79 dm <sup>3</sup> | 209.00 g     |
| 4008321928092 | HALOLINE PRO 120 W 230 V R7S | Shipping carton box<br>20    | 93 mm x 77 mm x 113 mm               | 0.81 dm <sup>3</sup> | 207.00 g     |
| 4008321977670 | HALOLINE PRO 120 W 230 V R7S | Shipping carton box<br>20    | 137 mm x 77 mm x 112 mm              | 1.18 dm <sup>3</sup> | 301.00 g     |
| 4008321207692 | HALOLINE PRO 230 W 230 V R7S | Shipping carton box<br>20    | 149 mm x 79 mm x 113 mm              | 1.33 dm <sup>3</sup> | 317.75 g     |
| 4008321207715 | HALOLINE PRO 400 W 230 V R7S | Shipping carton box<br>20    | 149 mm x 78 mm x 113 mm              | 1.31 dm <sup>3</sup> | 328.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany