

Product datasheet

DULUX D 26 W/830

OSRAM DULUX D | CFLni, 2 tubes, with 2-pin base for CCG operation



Product datasheet

Technical data

Electrical data

Nominal current	0.33 A A
-----------------	----------

Photometrical data

Light color (designation)	LUMILUX Warm White
Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.78
Rated LLMF at 6,000 h	0.76
Rated LLMF at 8,000 h	0.75
Luminous flux	1750 lm
Color rendering index Ra	≥80

Dimensions & weight



Overall length	172.00 mm
Length with base excl. base pins/connection	149,00 mm
Product weight	43.00 g

Temperatures & operating conditions

Ambient temperature range	-5...+40 °C
---------------------------	-------------

Lifespan

Service life	6500 h
Nominal lamp life time	10000 h

Additional product data

Mercury content	1.6 mg
Appropriate disposal acc. to WEEE	Yes

Product datasheet

Certificates & standards

Energy efficiency class	G
Energy consumption	27.00 kWh/1000h


Country specific categorizations

ILCOS	FSQ-26/830-I-G24d-3
-------	---------------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4050300025711
Declaration No. in SCIP database	In work

Light Distribution

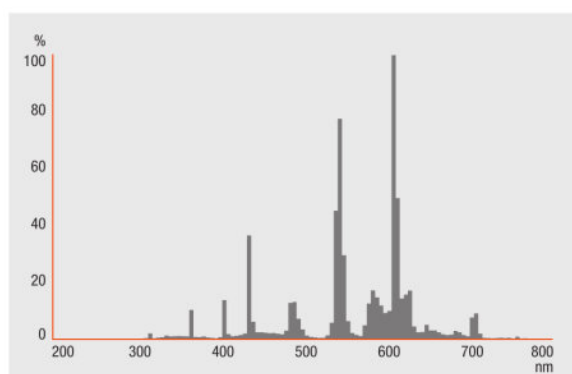


FL_830

Equipment / Accessories

– Suitable for operation on conventional control gear

Product datasheet



SINGLE LAMP WITH CONTROL GEAR

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300025711	DULUX D 26 W/830	Shipping carton box 10 Pieces Folding carton box	135 mm x 162 mm x 167 mm	3.65 dm ³	695.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany