

---

# Product family datasheet

## OSRAM DULUX L LUMILUX DE LUXE

CFLni, with 4-pin 2G11 base for ECG/CCG operation, high color rendering



## Product family datasheet

### Technical data



Product description	Electrical data	Photometrical data	Dimensions & weight		Temperatures & operating conditions	Additional product data	Certificates & standards
	Nominal current	Light color (designation)	Overall length	Product weight	Ambient temperature range	Product remark	Energy efficiency class
DULUX L 36 W/954 2G11 <sup>1)</sup>	0.43 A A	LUMILUX DE LUXE Daylight	415.00 mm	94.29 g	-5...+40 °C	For ECG and CCG operation	G
DULUX L 55 W/954 2G11 <sup>2)</sup>	0.55 A A	LUMILUX DE LUXE Daylight	538.00 mm	120.5 g	-5...+40 °C	For ECG operation only	G

Product description	Energy consumption	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
		Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
DULUX L 36 W/954 2G11 <sup>1)</sup>	38.00 kWh/1000h	18-04-2022	4050300018461	In work
DULUX L 55 W/954 2G11 <sup>2)</sup>	58.00 kWh/1000h	18-04-2022	4050300321400	In work

<sup>1)</sup> For ECG and CCG operation

<sup>2)</sup> For ECG operation only

## Product family datasheet

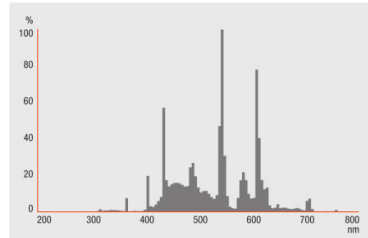

---

DULUX L 36 W/954 2G11, DULUX L 55  
W/954 2G11

---

DULUX L 36 W/954 2G11

---

### Equipment / Accessories

- Suitable for operation on electronic and conventional control gear

---

### Application advice

For more detailed application information and graphics please see product datasheet.

## Product family datasheet

### Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300018461	DULUX L 36 W/954 2G11	Shipping carton box 10	455 mm x 103 mm x 136 mm	6.37 dm <sup>3</sup>	1288.67 g
4050300321400	DULUX L 55 W/954 2G11	Shipping carton box 10	136 mm x 103 mm x 578 mm	8.10 dm <sup>3</sup>	1663.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany