

Product datasheet

L 40 W/865 G10Q

LUMILUX T9 C | Circular fluorescent lamps 29 mm, with G10Q base



Technical data



Electrical data

Nominal current	0.42 A A
-----------------	----------

Photometrical data

Light color (designation)	LUMILUX Cool Daylight
Rated LLMF at 2,000 h	0.72
Rated LLMF at 4,000 h	0.67
Rated LLMF at 6,000 h	0.65
Rated LLMF at 8,000 h	0.63
Luminous flux	2800 lm

Dimensions & weight



Tube diameter	29 mm
Product weight	233.4 g
Overall length	399.00 mm

Lifespan

Service life	6300 h
--------------	--------

Additional product data

Mercury content	4.8 mg
Appropriate disposal acc. to WEEE	Yes


Certificates & standards

Energy efficiency class	G
Energy consumption	42.00 kWh/1000h

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4008321960139
Declaration No. in SCIP database	In work

Light Distribution

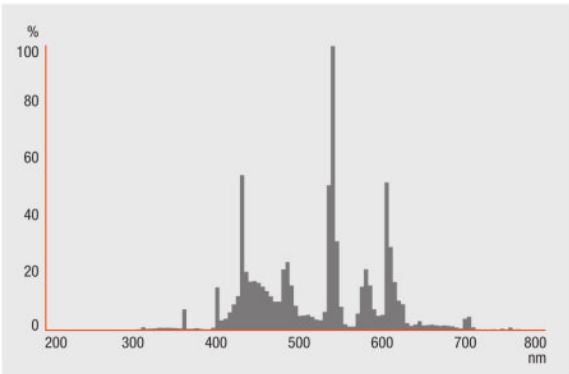


FL_865

Equipment / Accessories

- Suitable for operation on electronic and conventional control gears

Product datasheet

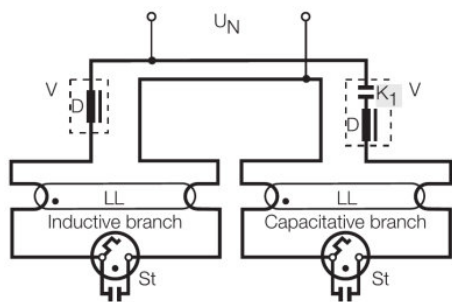

DUO CIRCUIT

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321960139	L 40 W/865 G10Q	Shipping carton box 12 Pieces Sleeves	452 mm x 436 mm x 431 mm	84.94 dm ³	5865.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to
▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

L 40 W/865 G10Q

LUMILUX T9 C | Circular fluorescent lamps 29 mm, with G10Q base

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Power factor λ [PIM]	Luminous flux at 25 °C
L 40 W/865 G10Q	QTP-OPTIMAL 1x18-40	4008321873743	0.18 A	41.10 W	0.98	1*3200 lm

Product name	Product name ECG	EAN	Number of lighting outlets
L 40 W/865 G10Q	QTP-OPTIMAL 1x18-40	4008321873743	1