

# Product datasheet

## HQI-T 70 W/WDL

POWERSTAR HQI-T G12 | Metal halide lamps with quartz technology for enclosed luminaires



# Product datasheet

## Technical data


### Electrical data

PFC capacitor at 50 Hz	12 $\mu$ F
Ignition voltage	3.6/5.0 kVp
Nominal current	0.95 A A

### Photometrical data

Rated LLMF at 2,000 h	0.85
Rated LLMF at 4,000 h	0.8
Rated LLMF at 6,000 h	0.75
Rated LLMF at 8,000 h	0.7
UV protection	Yes
Luminous flux	5400 lm

### Dimensions & weight

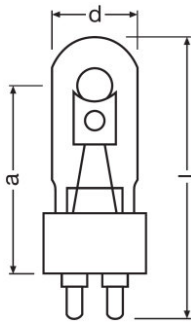

Light center length (LCL)	56,0 mm
Product weight	30.00 g
Overall length	84.00 mm

### Temperatures & operating conditions

Maximum permitted pinch temperature	280 °C
-------------------------------------	--------

### Lifespan

Lifespan B50	9000 h
--------------	--------

### Additional product data

Design / version	Clear
Mercury content	13.0 mg

## Product datasheet

Appropriate disposal acc. to WEEE	Yes
-----------------------------------	-----

### Capabilities

Burning position	Any
Enclosed luminaire required	Yes

### Certificates & standards

Energy efficiency class	G
Energy consumption	76.00 kWh/1000h

### Country specific categorizations


ILCOS	MT/UB-70/730-H/E/SL-G12-25/84
-------	-------------------------------

### Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	02-09-2022
Primary Article Identifier	4008321974341
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

## Light Distribution

---

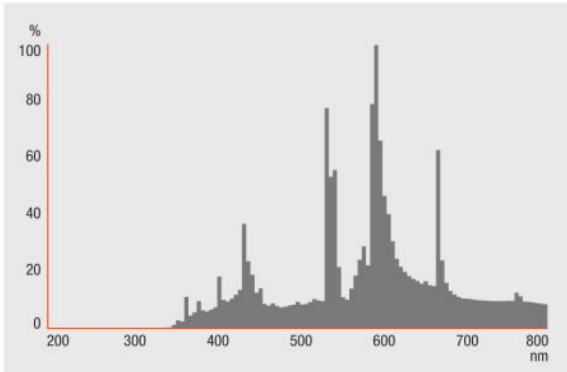


HQI\_T\_WDL\_G12

---


## System guarantee

For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

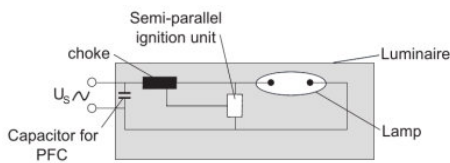

---


OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

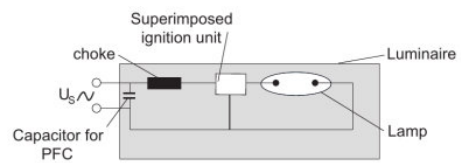


---

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

## Product datasheet

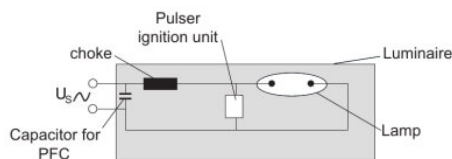

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

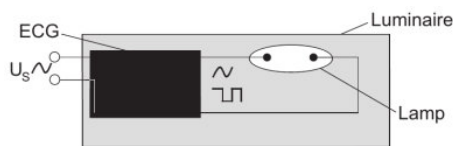

ELEKTRONIC OPERATION OF HIGH INTENSITY DISCHARGE LAMPS

### Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321974341	HQI-T 70 W/WDL	Shipping carton box 12 Pieces Folding carton box	180 mm x 127 mm x 140 mm	3.20 dm <sup>3</sup>	567.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany

## HQI-T 70 W/WDL

POWERSTAR HQI-T G12 | Metal halide lamps with quartz technology for enclosed luminaires

Product name	Product name ECG	EAN
HQI-T 70 W/WDL	PT-FIT 70/220-240 I	4008321377685
	PT-FIT 70/220-240 S	4008321386649
	PTi 70/220-240 I	4008321099501
	PTo 150/220-240 3DIM	4008321956385
	PTo 70/220-240 3DIM	4008321959355