

Product datasheet

HQI-T 250 W/D PRO

POWERSTAR HQI-T | Metal halide lamps with quartz technology for enclosed luminaires



Product datasheet

Technical data


Electrical data

PFC capacitor at 50 Hz	32 μ F
Ignition voltage	4.0/5.0 kVp
Nominal current	3 A A

Photometrical data

Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.92
Rated LLMF at 6,000 h	0.9
Rated LLMF at 8,000 h	0.87
Rated LLMF at 12,000 h	0.85
UV protection	Yes
Luminous flux	18000 lm

Dimensions & weight



Light center length (LCL)	150 mm
Product weight	150.00 g
Overall length	226.00 mm

Temperatures & operating conditions

Maximum permitted base edge temperature	250 °C
---	--------

Lifespan

Lifespan B50	16000 h
--------------	---------

Additional product data

Design / version	Clear
------------------	-------

Product datasheet

Mercury content	21.0 mg
Appropriate disposal acc. to WEEE	Yes

Capabilities

Burning position	Any
Enclosed luminaire required	Yes

Certificates & standards

Energy efficiency class	G
Energy consumption	260.00 kWh/1000h


Country specific categorizations

ILCOS	MT/UB-250/952-H/E/SL-E40-46/226
-------	---------------------------------



Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	13-05-2022
Primary Article Identifier	4008321677846
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Light Distribution

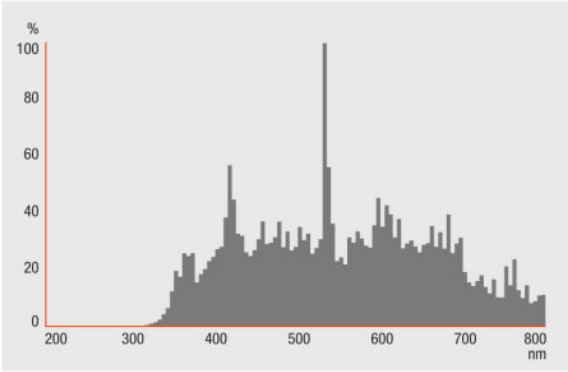


HQI_T_D_PRO

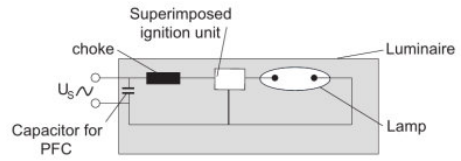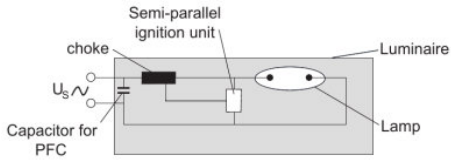

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

Product datasheet

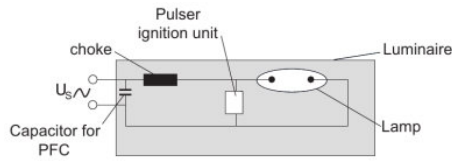

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321677846	HQI-T 250 W/D PRO	Shipping carton box 12 Pieces Sleeves	216 mm x 166 mm x 272 mm	9.75 dm ³	2366.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HQI-T 250 W/D PRO

POWERSTAR HQI-T | Metal halide lamps with quartz technology for enclosed luminaires

Product name	Product name ECG	EAN
HQI-T 250 W/D PRO	PTo 250/220-240 3DIM	4008321863669