

# Product family datasheet

## POWERSTAR HQI-E coated

Metal halide lamps with quartz technology for enclosed luminaires



- Factories and workshops Exhibition halls and trade fairs Sports halls and multi-purpose halls Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires

- Long lifetime E40 screw base for simple lamp handling UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter
- Product features POWERSTAR® quartz technology Light colors: neutral white (NDL), daylight (D) Product benefits Long lifetime E40 screw base for simple lamp handling UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter Areas of application Factories and workshops Exhibition halls and trade fairs Sports halls and multi-purpose halls Approved only for use in enclosed luminaires Outdoor applications only in suitable luminaires




# Product family datasheet


## Technical data

Product description	Electrical data	Dimensions & weight		Certificates & standards		Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
	Nominal current	Product weight	Overall length	Energy efficiency class	Energy consumption	Date of Declaration	Primary Article Identifier
HQI-E 250 W/D PRO	3 A A	160.00 g	226.00 mm	G	260.00 kWh/1000h	18-04-2022	4008321677907

Product description	Declaration No. in SCIP database
HQI-E 250 W/D PRO	In work

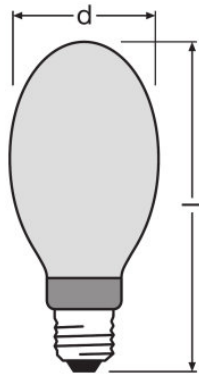

HQI-E 250 W/D PRO

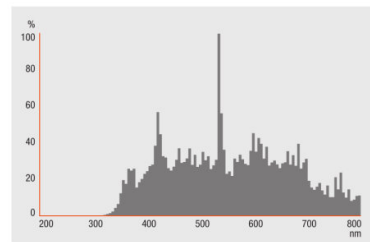

HQI-E 250 W/D PRO

## Product family datasheet

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321677907	HQI-E 250 W/D PRO	Shipping carton box 12	426 mm x 331 mm x 252 mm	35.53 dm <sup>3</sup>	2879.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

---

OSRAM is distribution partner  
of LEDVANCE of LAMPS

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany