

## HTI


Metal halide lamps, double-ended



### Product family benefits

- High luminance
- High luminous efficacy and efficiency



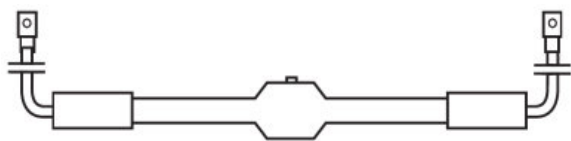

---

330966\_HTI AND HMD METAL HALIDE LAMPS

Product family datasheet

Technical data

Product description	Electrical data		Photometrical data				Dimensions & weight
	Nominal voltage	Nominal current	Nominal luminous flux	Luminance	Color temperature	Color rendering index Ra	Diameter
HTI 4000 W/DE	105 V	38 A	360000 lm	35000 cd/cm <sup>2</sup>	6300 K	90	400 mm

Product description	Length	Light center length (LCL)	Lifespan	Additional product data	Capabilities
			Lifespan	Base (standard designation)	Burning position
HTI 4000 W/DE	2700 mm	140.0 mm	500 h	S25.5	Other

Product description	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	CAS No. of substance 1
HTI 4000 W/DE	05-03-2024	4050300519845	Lead	7439-92-1

Product description	Safe Use Instruction	Declaration No. in SCIP database
HTI 4000 W/DE	The identification of the Candidate List substance is sufficient to allow safe use of the article.	14217482-32e1-42e5-8615-ee9cd0820f8e

## Product family datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, HTI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.