

## LF05A -B3-P

LINEARlight FLEX Protect | Colored flexible LED strips, cuttable



### Areas of application

- Decorative applications
- Wall integration
- Backlighting of complex structures
- Path lighting
- Signage

### Product family benefits

- High-performance silicone for extremely long life and flexibility
- Stylish design
- Simple connection thanks to premounted connectors

### Product family features

- Flexible and cuttable LED strip
- Type of protection: IP67
- Dimmable
- Fine White
- Highly UV-resistant
- Salt mist proof



## Product datasheet

### Technical data

#### Electrical data

Type of current	DC
Accidental reverse input voltage protection up to	25 V
Nominal wattage	72.00 W
Nominal voltage	24.0 V
Nominal current	3 A
Input voltage range	23...25 V

#### Photometrical data

Light color (designation)	Blue
Nominal dominant wavelength	467 nm
Luminous efficacy	12 lm/W
Luminous flux	840 lm
Light color LED	Blue

#### Light technical data

Beam angle	120 °
------------	-------

#### LED module information

Number of LEDs per module	495
---------------------------	-----

#### Dimensions & weight



Length	9900 mm <sup>1)</sup>
Length – smallest unit	100.0 mm
Width	11.0 mm
Height	4.5 mm
Cable length	500.0 mm

## Product datasheet

Product weight	800.00 g
----------------	----------

<sup>1)</sup> LED pitch 20 mm

### Colors & materials

Cover material	Silicone
Body material	Silicone

### Temperatures & operating conditions

Temperature range in operation at T <sub>c</sub> point	-30...75 °C <sup>1)</sup>
Temperature range at storage	-40...+85 °C


<sup>1)</sup> At the T<sub>c</sub> point

### Lifespan

Lifespan	50000 h <sup>1)</sup>
----------	-----------------------

<sup>1)</sup> L70/B50 at T<sub>c</sub> 40 °C

### Additional product data

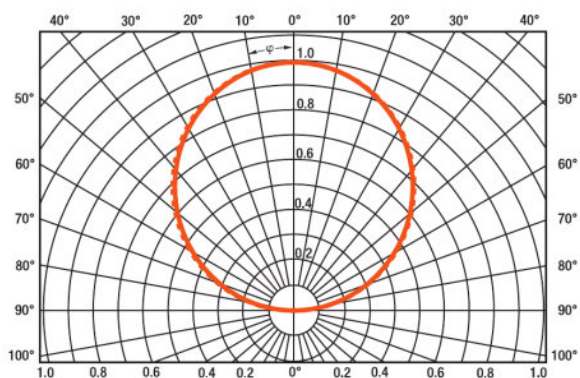

### Luminous intensity distribution

## Product datasheet

<b>Product remark</b>	Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information (see <a href="http://www.osram.com/led-systems">www.osram.com/led-systems</a> )/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values
-----------------------	--

### Capabilities

<b>Dimmable</b>	Yes <sup>1)</sup>
-----------------	-------------------

<sup>1)</sup> PWM

### Certificates & standards

<b>Type of protection</b>	IP67
<b>Standards</b>	CE




### Logistical data

<b>Commodity code</b>	940540399000
-----------------------	--------------

### Equipment / Accessories

- CONNECTsystem LF-PROTECT
- LINEARlight Track LT

### Download Data

File	
	Product Datasheet 335842_LINEARlight Flex Protect LF05A-P (EN)
	Declarations of conformity 466011_EC-DoC LF05A-E-P
	Eulumdat 327873_LINEARlight Flex Protect LF05A-B3-P

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321617804	LF05A -B3-P	Shipping carton box 8	366 mm x 380 mm x 286 mm	39.78 dm <sup>3</sup>	8971.00 g

## Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.