

PAR64

Halogen lamps with parabolic reflector PAR64, with pin base



Areas of application

- Events
- Performances
- Stage productions

Product family benefits


- Easy lamp replacement
- Flexible operating position

Product family features

- The parabolic glass reflector and the front lens are fused together
- High luminous intensity
- Available in different beam angles to ensure high flexibility



Product family datasheet

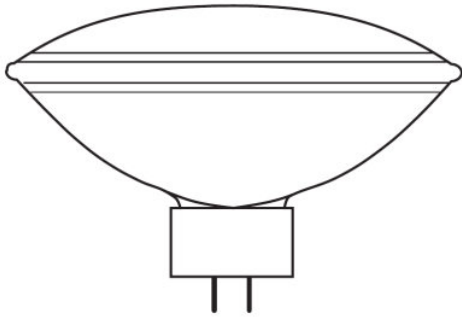

330867_PAR 64 HALOGEN LAMPS

Product family datasheet

Technical data

Product description	Electrical data	Photometrical data		Light technical data	Dimensions & weight	
	Nominal voltage	Color temperature	Luminous intensity	Beam spot height	Light center length (LCL)	Diameter
PAR64 64739/4 MFL ¹⁾	240 V	3200 K	125000 cd	43 m	102.0 mm	204.0 mm
PAR64 64738/4 NSP ²⁾	240 V	3200 K	270000 cd	43 m	102.0 mm	204.0 mm
PAR64 64737/4 VNSP	240 V	3200 K	320000 cd	43 m	102.0 mm	204.0 mm

Product description	Lifespan	Additional product data	Capabilities	Country specific categorizations	Environmental information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)
	Lifespan	Base (standard designation)	Burning position	ANSI code	Date of Declaration
PAR64 64739/4 MFL ¹⁾	300 h	GX16d	hs30 ³⁾	Other	08-09-2023
PAR64 64738/4 NSP ²⁾	300 h	GX16d	hs30 ³⁾	Other	08-09-2023
PAR64 64737/4 VNSP	300 h	GX16d	hs30 ³⁾	Other	06-09-2023

Product description	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PAR64 64739/4 MFL ¹⁾	4062172359252	No declarable substances contained	No declarable substances contained
PAR64 64738/4 NSP ²⁾	4062172359238	No declarable substances contained	No declarable substances contained
PAR64 64737/4 VNSP	4062172359214		In work

¹⁾ Beam angle: MFL = medium flood

²⁾ Beam angle: NSP = narrow spot

³⁾ Do not tilt perpendicular to the filament

Product family datasheet

Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (cover panel etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. Because of the heat produced only heat-resistant lamp connections (holders) may be used. Do not operate near people, or any materials that are flammable, sensitive to heat or affected by drying out. Detailed information is available on request.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.