

Product datasheet

## SUPER H1

Up to 30% more light



### Up to 30% more light

For better visibility and shorter reaction times compared to standard halogen lamps




### Enhanced illumination

For extra confidence



### Convincing price-performance ratio

For better visibility at a reasonable price

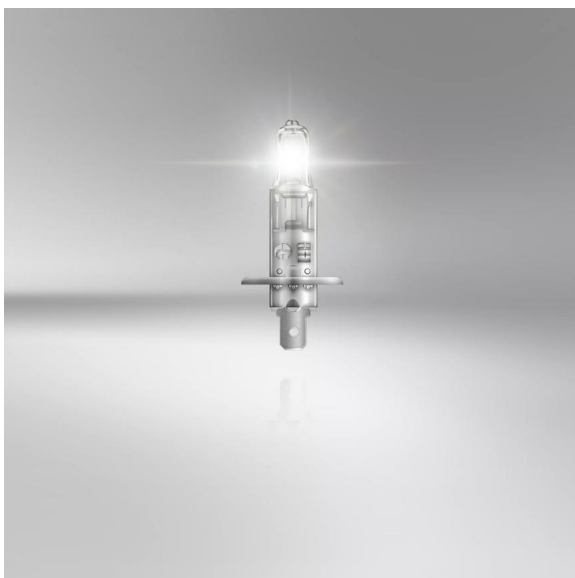

### Up to 30% more light on the road

SUPER headlight lamps offer more performance for the most important lamp types. With up to 30% more light compared to standard lamps, signs, obstacles and hazards are more rapidly recognized.

# Product datasheet

## Technical data

### Product information

|   |                        |
|---|------------------------|
| Application (Category and Product specific) | Halogen headlight lamp |
|---|------------------------|

### General Product Information

|                        |          |
|------------------------|----------|
| Global order reference | 64150SUP |
|------------------------|----------|

### Electrical Data


|                 |                    |
|-----------------|--------------------|
| Power input     | 68 W <sup>1)</sup> |
| Nominal voltage | 12 V               |
| Nominal wattage | 55 W               |
| Test voltage    | 13.2 V             |

<sup>1)</sup> Maximum

### Photometric Data

|                         |         |
|-------------------------|---------|
| Nominal luminous flux   | 1550 lm |
| Luminous flux tolerance | ±15 %   |
| Color temperature       | 3200 K  |

## Physical Attributes & Dimensions



|                |         |
|----------------|---------|
| Diameter       | 8.5 mm  |
| Product weight | 6.30 g  |
| Length         | 62.5 mm |
| Lamp base      | P14.5s  |

### Lifetime Data

|             |        |
|-------------|--------|
| Lifespan B3 | 150 hr |
| Lifespan Tc | 350 hr |

## Product datasheet

### Capabilities

|            |     |
|------------|-----|
| Technology | HAL |
|------------|-----|

### Certificates & standards

|              |    |
|--------------|----|
| ECE category | H1 |
|--------------|----|

### Environmental & Regulatory Information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |   |
|---|---|
| Primary article identifier  | 4062172346542   4050300479408   4050300484648 |
| Candidate list substance 1  | No declarable substances contained            |
| Declaration no. in SCIP database                                      | No declarable substances contained            |

### Country specific information



| Product code  | METEL code   | SEG-No. | STK-Number | UK Org |
|---------------|--------------|---------|------------|--------|
| 4050300479408 | OSRA64150SUP | -       | -          | -      |
| 4050300479408 | OSRA64150SUP | -       | -          | -      |

### Logistical Data

| Product code  | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume               | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4050300479408 | SUPER H1            | Folding carton box<br>1      | 25 mm x 23 mm x<br>70 mm             | 0.01 dm <sup>3</sup> | 9.00 g       |
| 4050300479422 | SUPER H1            | Shipping carton box<br>100   | 245 mm x 145 mm x<br>140 mm          | 4.97 dm <sup>3</sup> | 955.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

| File  |
|---|
|  User instruction<br>GPRS_Safety symbols instructions                |
|  Addon Technical Information<br>Certificate overview OSRAM Argentina |

### Application advice

## Product datasheet

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



# OSRAM