Product datasheet

LEDriving PX-5

LED daytime running light for retrofit

LED pixel technology
Dynamic appearance thanks to faceted optic and dotted pixel technology

DRL
LED daytime running light compatible with a wide range of car models and easy to install

5200 K
For drivers who want to increase visibility during the day

Stylish highlights for your car

LEDriving PX-5 serves as a high performance and energy-efficient daytime running light for retrofitting on your vehicle. With its patterned diode design of five LEDs, the LEDriving PX-5 gives your vehicle a modern and stylish look. This daytime running light system is compatible with a wide range of vehicle models and is easy to install. The careful design of the LEDriving system ensures a horizontal tilt of 10 degrees. In addition, the left-hand and right-hand lamps can be switched, thus making installation uncomplicated. Furthermore, the high color temperature of 5,200 Kelvin and long life of up to 5,000 hours provide endless driving pleasure with LEDriving PX-5. OSRAM provides a 3-year guarantee for this product. Note: LEDriving PX-5 is certified according to ECE, SAE and CCC regulations (ECE E4 approval; ECE R87 approval).

© 2026, OSRAM GmbH. All rights reserved.

Technical data

General Product Information

Global order reference	LEDDRL301

Electrical Data

Nominal voltage	12 V
Nominal wattage	12 W

Photometric Data

Color temperature	5200 K
Nominal luminous flux	300 lm

Physical Attributes & Dimensions

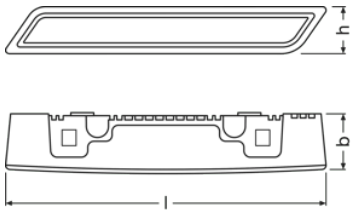

Length	160.0 mm
Product weight	552.00 g
Width	30.0 mm
Height	23.0 mm

Lifetime Data

Guarantee	3 years

Additional product data

Connector to lamp	Wire Kit

Capabilities

Technology	LED

Certificates & standards

© 2026, OSRAM GmbH. All rights reserved.

Approval marks – approval	E4 approval
Standards	ECE R87

Logistical data

Commodity code	85122000900

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACh)	
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	24fd4b7d-c774-46f3-9b44-7c1767b813ea

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899170766	LEDriving PX-5	Folding carton box 1	286 mm x 79 mm x 203 mm	4.59 dm^3	762.00 g
4052899170773	LEDriving PX-5	Shipping carton box 5	444 mm x 305 mm x 231 mm	31.28 dm^3	4349.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

	File
	User instruction LED Daytime Running Light Kit LEDDRL301 (User Manual)
	User instruction LED Daytime Running Light Kit LEDDRL301 CL15 (User Manual)
	User instruction GPRS_Safety symbols instructions

Legal advice

ECE E4 approvalECE R87 approval

References / Links

© 2026, OSRAM GmbH. All rights reserved.

Guarantee terms are available at www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM

© 2026, OSRAM GmbH. All rights reserved.