

PL-CORE AC -800-840

PrevaLED Core AC G2 | Spot-, Down- and Wallmount Light Engines and Modules



Product family features

- LED light engine with integrated driver
- Light emitting surface, diameter, mounting holes positioning according to Zhaga Book 3
- Poke-in wire connection (no special connector required)
- Available with luminous flux: 800 lm, 2,000 lm
- System efficacy: up to 109 lm/W
- Color temperature: 2,700 K, 3,000 K or 4,000 K
- Color rendering index R_a : typ. 83
- Maximum housing temperature: 80 °C at t_c point
- Initial color consistency: < 3 SDCM
- Power factor: > 0.95
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1

Product family benefits

- Connect directly to 220...240 V AC mains voltage for class 1 luminaires
- No external driver required
- Easy efficiency upgrade from generation 1 modules due to unchanged form factor
- Enables very high degree of freedom in luminaire design
- Allows very compact luminaire designs
- Less complexity in logistics as no external driver or special cables are required
- Enhanced safety thanks to protective cover glass and reversible thermal shutdown
- Easy to integrate due to compatibility with Zhaga book 3 heatsinks and reflectors
- Chip-On-Board technology with great homogeneity, no diffuser required
- 5 year guarantee



Product datasheet

Areas of application

- Spotighting in shops
- Down- and wall lighting in offices, corridors, meeting rooms, workplaces
- Decorative and functional lighting in the hospitality industry
- Accent lighting

Product datasheet

Technical data

Electrical data

Nominal voltage	230 V
Input voltage range	220...240 V
Type of current	AC


Photometrical data

Luminous efficacy	99 lm/W
Color rendering index Ra	83
Light color (designation)	Neutral White

Light technical data

Starting time	0.3 s
Warm-up time (60 %)	0.30 s
Diameter of light emitting surface	14.0 mm

Dimensions & weight

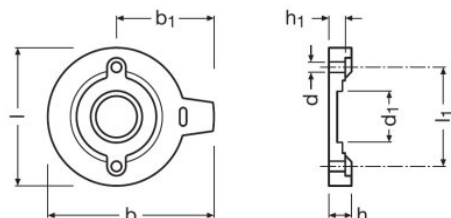

Diameter	50.0 mm
Product weight	18.60 g

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	65 °C
Maximum temperature at tc test point	80 °C
Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...85 °C

Lifespan

Number of switching cycles	50000
----------------------------	-------

Additional product data

Maximum thermal load	7.2 W
Product remark	For current photometric data and important safety, installation and application information (see www.osram.com/led-systems), All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values/Tolerance for optical and electrical data: +/- 10%

Certificates & standards

Standards	Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61000-3-2/Acc. to EN 61000-3-3/Acc. to EN 61547/Acc. to EN 62471
Type of protection	IP20

Logistical data

Commodity code	853951000000
----------------	--------------

Environmental information



Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	23-12-2021
Primary Article Identifier	4052899996120
Candidate List Substance 1	No declarable substances contained
CAS No. of substance 1	No CAS
Declaration No. in SCIP database	No declarable substances contained

Product datasheet

Additional product information

- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- For safety reasons the LED light engine must not be operated if the housing is damaged.
- The LED engine needs to be built into a luminaire.
- Not released for dimming operation.
- Suitable only for operation with line voltage.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- Suitable for luminaires of protection class I, grounding is mandatory to comply with safety standards.
- When used in a luminaire of protection class II compliance with the required safety standards has to be ensured by the luminaire manufacturer.
- This LED module is not recommended to be used in rooms with fast moving parts as the light modulation can cause stroboscopic effects.
- This LED module might interfere with displays and cameras due to modulation.
- The LED module itself and all its components must not be stressed mechanically.
- For optimal cooling a thermal interface material should be applied between LED module and heat sink.
- It is highly recommended to use a thermal interface material (TIM). The TIM needs to enable adequate heat transfer, during installation it has to be taken care not to create air inclusions between surfaces. For this purpose it is recommended to use a heat sink with even and clean surfaces.
- The LED module should be mounted to a heat sink with M3 screws or suitable accessories. Maximum tightening torque for mounting screws need to be observed as excessive force may damage the housing.
- Protect against splashes!
- The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
- To avoid mechanical damage, the LED modules have to be attached securely to the intended mounting surface. It is recommended to avoid heavy vibration.
- Do not remove the cover or the safety glass from the LED module. Do not operate a LED module when the safety glass is broken, missing or cracked.

Download Data

	File
	Certificates PrevaLED Core AC - VDE Certificate (ENDE)
	Certificates VDE Certificate PL-Core AC G2

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899996120	PL-CORE AC -800-840	Shipping carton box 50	370 mm x 380 mm x 88 mm	12.37 dm ³	2033.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit

▶ www.osram.com/system-guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.