

## Halogen (> 130 V) Double End





### Areas of application

- Stage & Theatre
- Studio, TV, & Film
- Professional Photography
- Club & Disco

### Product features and benefits

- Robust construction for lasting performance
- Consistent color over the life of the lamps
- Instant on and nearly constant luminous flux over the life of the lamp
- Broad product portfolio supporting the stage and studio markets
- Dimmable with traditional amber shift



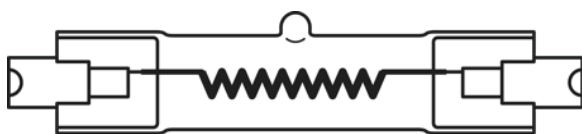

---

HALOGEN STUDIO LAMP 64571, 64572




---

HALOGEN STUDIO LAMP 64580



---

HALOGEN STUDIO LAMP 64751

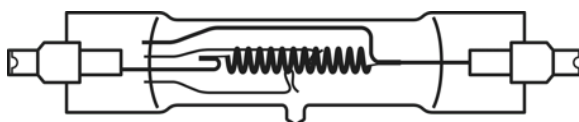

---

HALOGEN STUDIO LAMP 64781

Product family datasheet

Technical data

|                     | General Product Information |          | Electrical Data | Physical Attributes & Dimensions |
|---------------------|-----------------------------|----------|-----------------|----------------------------------|
| Product description | ANSI code                   | LIF code | Nominal voltage | Lamp base                        |
| 64571 800 W 230 V   | DXX                         | P2/13    | 230 V           | R7s                              |
| 64571 800 W 240 V   | DXX                         | P2/13    | NaN V           | R7s                              |
| 64572 1000 W 230 V  | -                           | P2/35    | 230 V           | R7s                              |
| 64580 1000 W 230 V  | -                           | P1/12    | 230 V           | R7s                              |
| 64580 1000 W 240 V  | -                           | P1/12    | 240 V           | R7s                              |
| 64583 1000 W 230 V  | -                           | P2/20    | 230 V           | R7s                              |
| 64583 1000 W 240 V  | -                           | P2/20    | 240 V           | R7s                              |
| 64741 1000 W 230 V  | EKM                         | P2/7     | 230 V           | R7s                              |
| 64741 1000 W 240 V  | EKM                         | P2/7     | 240 V           | R7s                              |
| 64751 1250 W 230 V  | -                           | P2/12    | 230 V           | R7s                              |
| 64751 1250 W 240 V  | -                           | P2/12    | 240 V           | R7s                              |
| 64781 2000 W 240 V  | -                           | P2/27    | 240 V           | RX7s                             |

|                     | Lifetime Data    |
|---------------------|------------------|
| Product description | Nominal lifetime |
| 64571 800 W 230 V   | 75 hr            |
| 64571 800 W 240 V   | 75 hr            |
| 64572 1000 W 230 V  | 75 hr            |
| 64580 1000 W 230 V  | 15 hr            |
| 64580 1000 W 240 V  | 15 hr            |
| 64583 1000 W 230 V  | 200 hr           |
| 64583 1000 W 240 V  | 200 hr           |
| 64741 1000 W 230 V  | 200 hr           |
| 64741 1000 W 240 V  | 200 hr           |
| 64751 1250 W 230 V  | 200 hr           |
| 64751 1250 W 240 V  | 200 hr           |
| 64781 2000 W 240 V  | 300 hr           |

## Product family datasheet

---

### Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.