

Halogen (> 130 V) Double End



应用领域


- 舞台及剧场
- 演播室，电视电影
- Professional Photography
- 舞会及俱乐部

产品特点

- Robust construction for lasting performance
- Consistent color over the life of the lamps
- Instant on and nearly constant luminous flux over the life of the lamp
- Broad product portfolio supporting the stage and studio markets
- Dimmable with traditional amber shift



产品系列数据表

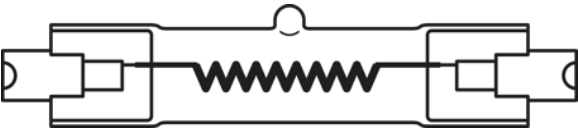


HALOGEN STUDIO LAMP 64571, 64572



HALOGEN STUDIO LAMP 64580



HALOGEN STUDIO LAMP 64751

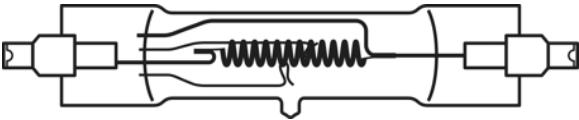

HALOGEN STUDIO LAMP 64781

产品系列数据表

技术参数

	General Product Information		电参数	Physical Attributes & Dimensions
产品描述	ANSI编码	LIF	标称电压	灯头 (标准名称)
64571 800 W 230 V	DXX	P2/13	230 V	R7s
64571 800 W 240 V	DXX	P2/13	NaN V	R7s
64572 1000 W 230 V	-	P2/35	230 V	R7s
64580 1000 W 230 V	-	P1/12	230 V	R7s
64580 1000 W 240 V	-	P1/12	240 V	R7s
64583 1000 W 230 V	-	P2/20	230 V	R7s
64583 1000 W 240 V	-	P2/20	240 V	R7s
64741 1000 W 230 V	EKM	P2/7	230 V	R7s
64741 1000 W 240 V	EKM	P2/7	240 V	R7s
64751 1250 W 230 V	-	P2/12	230 V	R7s
64751 1250 W 240 V	-	P2/12	240 V	R7s
64781 2000 W 240 V	-	P2/27	240 V	RX7s

	寿命
产品描述	Average Rated Life
64571 800 W 230 V	75 hr
64571 800 W 240 V	75 hr
64572 1000 W 230 V	75 hr
64580 1000 W 230 V	15 hr
64580 1000 W 240 V	15 hr
64583 1000 W 230 V	200 hr
64583 1000 W 240 V	200 hr
64741 1000 W 230 V	200 hr
64741 1000 W 240 V	200 hr
64751 1250 W 230 V	200 hr
64751 1250 W 240 V	200 hr
64781 2000 W 240 V	300 hr

产品系列数据表

安全建议

为避免人身伤害或财产损失，卤素灯只能在设计有合适结构（护罩、网格等）的合适灯具中操作，以确保在灯破裂时无零件/碎片崩出。还必须给出警告标志来指示这些灯会散发高热量。详细资讯可根据要求索要。

应用建议

更多详细应用信息和图形,请参阅产品数据表。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。