

Halogen (< 75 V) with Reflector



应用领域


- Microscopy
- Laboratory & Analysis
- UV Curing
- Fiber Illumination
- Surgical & Dental Overhead

产品特点


- Precise filament alignment with patented quartz pinch technology
- OSRAM HLX lamps provide 10% higher luminous efficacy over standard halogen
- Instant on and nearly constant luminous flux over the life of the lamp
- Dimmable




产品系列数据表

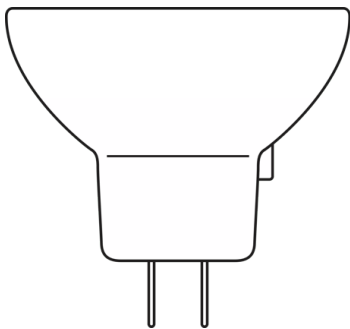


HALOGEN LAMP WITH REFLECTOR 64255




Halogen Lamp with reflector MR16




64617S 75W 12V



64615 HLX 75W 12V




Halogen Lamp with reflector MR11




64634 HLX 150W 15V


产品系列数据表



64627 HLX 100W 12V



64653 HLX 250W 24V



HALOGEN REFLECTOR LAMPS FO

产品系列数据表

技术参数

	General Product Information		电参数	Physical Attributes & Dimensions
产品描述	ANSI编码	LIF	标称电压	灯头 (标准名称)
64255 20 W 8 V	-	-	8 V	G4
93520 300 W 82 V ¹⁾	FHS	-	82 V	GX5.3
64607 50 W 8 V	EFM	A1/229	8 V	GZ6.35
64619 90 W 14.5 V	EPX	-	14.5 V	GX5.3
93506 250 W 120 V	ENH	-	120 V	GY5.3
64617 S 75 W 12 V ²⁾	-	-	12 V	G5.3-4.8
64615 HLX	EFN	A1/230	12 V	GZ6.35
64617 75 W 12 V	-	M/117	12 V	G5.3-4.8
64634 HLX	EFR	A1/232	15 V	GZ6.35
150 W 21 V GX5.3	EJM	-	21 V	GX5.3
64627 HLX	EFP	A1/231	12 V	GZ6.35
64624 100 W 12 V	-	A1/51	12 V	G5.3-4.8
64659 250 W 24 V	ELC	A1/259	24 V	GX5.3
93518 300 W 120 V	ELH	-	120 V	GY5.3
64629 100 W 12 V	EFP	A1/231	12 V	GZ6.35
64637 100 W 12 V	EBV	A1/271	12 V	GZ6.35
64635 HLX ³⁾	-	-	15 V	GZ6.35
64620 150 W 15 V	EFR	A1/232	15 V	GZ6.35
64653 HLX	ELC	A1/259	24 V	GX5.3
93654 250 W 24 V	ELC	-	24 V	GX5.3
93637 150 W 21 V	EJV	-	21 V	GX5.3
93638 150 W 21 V	EKE	-	21 V	GX5.3
93653 250 W 24 V	ELC	A1/259	24 V	GX5.3

	寿命
产品描述	Average Rated Life
64255 20 W 8 V	50 hr
93520 300 W 82 V ¹⁾	70 hr
64607 50 W 8 V	50 hr
64619 90 W 14.5 V	500 hr
93506 250 W 120 V	175 hr
64617 S 75 W 12 V ²⁾	25 hr
64615 HLX	50 hr
64617 75 W 12 V	25 hr
64634 HLX	50 hr
150 W 21 V GX5.3	40 hr
64627 HLX	50 hr
64624 100 W 12 V	25 hr
64659 250 W 24 V	1000 hr
93518 300 W 120 V	35 hr
64629 100 W 12 V	600 hr

产品系列数据表

	寿命
产品描述	Average Rated Life
64637 100 W 12 V	1500 hr
64635 HLX ³⁾	50 hr
64620 150 W 15 V	500 hr
64653 HLX	50 hr
93654 250 W 24 V	700 hr
93637 150 W 21 V	100 hr
93638 150 W 21 V	200 hr
93653 250 W 24 V	300 hr

1) 定制生产
2) 光点调整
3) 红外灯泡; 焦点温度在1300 °C

产品系列数据表

安全建议

为避免人身伤害或财产损失，卤素灯只能在设计有合适结构（护罩、网格等）的合适灯具中操作，以确保在灯破裂时无零件/碎片崩出。还必须给出警告标志来指示这些灯会散发高热量。详细资讯可根据要求索要。

应用建议

更多详细应用信息和图形,请参阅产品数据表。

免责声明

更改恕不另行通知。遗漏错误不承担任何责任。总是确保使用最新的信息。