

HTI 1200 W/SE XS 1/CS 1/SKU



Product features and benefits

- Robust design with eXtreme Seal (XS) technology on some types, allowing up to 450°C at the pinch seal
- Consistent lumen output over the life of the lamp
- Higher luminous efficacy than conventional HID lamps provides higher fixture efficiency

Areas of application

- Concert lighting
- Club & Disco
- Stage and theatre
- Studio, TV and film
- Architecture & Architainment

Technical data

General product information

Product Number	54141
Product Name	HTI 1200 W/SE XS 1/CS 1/SKU
Family Brand Name	HTI
Application	Entertainment and Effect Lighting
Product Remark	<ul style="list-style-type: none">- WARNING: Lamp has a special GY22 base. Ignition voltage must be applied only to the thin pin.- s (Operating Position) = Vertical, base down- Optimized lamp eXtreme Seal (XS) technology to withstand interior base temperatures of up to 450 degrees celsius.

Electrical data

Nominal Wattage	1200 W
Nominal Voltage	95 V
Current (A)	13.8 A
Type of Current	AC

Light technical data

Luminous Flux	105000 lm
Average Luminance (cd/cm2)	26000 cd/cm2
Light Center Length - LCL (mm)	59 mm
Color Temperature	5400 K
Average Rated Life	750 h


Physical attributes

Base	GY22
Bulb Shape	T
Maximum Overall Length (mm)	135 mm
Length l (mm)	135 mm
Length l max. (mm)	135 mm
Diameter d (in)	1.142 in
Diameter d (mm)	29.00 mm
Distance a (mm)	59 mm
Electrode Gap - cold (mm)	7 mm

Additional product data

Product datasheet

Operating Position	s 135
Maximum Base Temperature (°C)	450 C
Cooling	Forced
Hot Restart	Yes

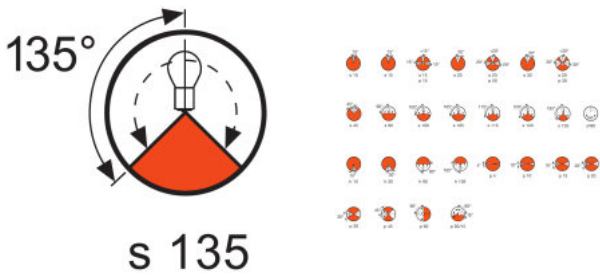

Packaging Information

Product number	EAN/UPC	Packaging	Quantity	Outside dimensions l x w x h	Gross weight
54141	4050300371153	Shipping box (Case)	1	12 in x 3.2 in x 4.5 in	0.6 lb

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

OSRAM does not accept liability for errors, changes and omissions.