



## BATTERYcharge SOLAR Cable



### More efficient connection than the 12V socket

Easier and cleaner to connect than battery clamps, whilst providing a more efficient connection than the 12V socket

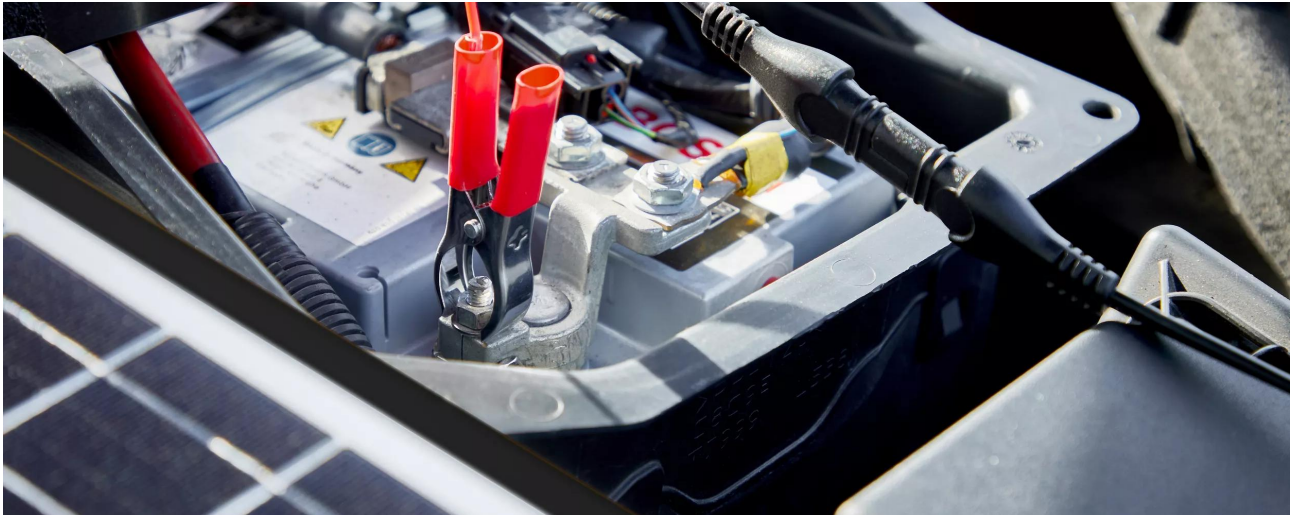

### 2m cable length for easy placement

Perfect for long-term battery maintenance



### Compatible with all OSRAM Solar Battery Maintainers

Provides a permanently 'On' link between solar maintainer and vehicle battery for long term maintenance



### Solar-powered battery maintenance for vehicles

Modern vehicles have a small but constant battery drain. They are packed full of electrical systems that are constantly working even when the ignition is not running. Alarms, immobilisers, and lock monitoring are examples of systems running in the background that can cause the battery to discharge even when the vehicle is not being used. The OSPOBD is compatible with OSRAM's OSP500, OSP1000 and OSP2000 Solar Battery Maintainers to allow connection via the vehicles OBDII port for a more efficient connection rather than through the 12V socket. It provides a permanently 'On' link between a solar panel and your battery for long term battery maintenance.

# Product datasheet

## Technical data

### Product information

Application (Category and Product specific)	Solar battery maintainer cable
---	--------------------------------

### General Product Information

Global order reference	OSPOBD
------------------------	--------

### Physical Attributes & Dimensions



Length	2000 mm
Width	48.0 mm
Height	20.0 mm

### Dimensions & weight

Power Cable Length	2.0 m
--------------------	-------

### Additional product data

Recommended to Use With	Motorcycle, Car, SUV, Van, Small Truck
Battery Connection	OBD Connector

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	9ca9aa98-2153-4666-8e81-39160acb07cb


## Product datasheet

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172404594	BATTERY charge SOLAR Cable	Folding carton box 1	165 mm x 45 mm x 138 mm	1.02 dm <sup>3</sup>	161.00 g
4062172404600	BATTERY charge SOLAR Cable	Shipping carton box 10	255 mm x 230 mm x 195 mm	11.44 dm <sup>3</sup>	1895.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction BATTERYcharge

#### Application advice

For more detailed application information and graphics please see product datasheet.

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM