

PrevaLED Linear G6 CRI90

Linear Light Engines



Product family features

- Module efficacy: up to 173 lm/W
- Available with luminous flux: 245 lm on 62 mm, 275 lm on 70 mm
- Available with luminous flux: 1,100 lm or 2,000 lm on 280 mm
- Available with luminous flux: 2,200 lm or 4,000 lm on 560 mm
- Color rendering index: > 90
- High initial color consistency: ≤ 3 SDCM
- Average lifetime (L80 B50): > 70,000 h (temperature at $T_c = 50^\circ\text{C}$)
- CE marked, ENEC certified; UL listed

Product family benefits

- Slim luminaire design by small and flexible form factor
- High homogeneity thanks to small LED pitch
- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation
- Adjustable luminous flux, efficacy and lifetime
- Direct the light where it's needed while using PrevaLED Linear Optics

Areas of application

- Office
- Industry



Product family datasheet

Technical data

Product description	Electrical data				
	Nominal voltage	Nominal current	Type of current	Energy consumption in on-mode	On-mode power
PL-LIN-Z6 245-930 62X20-HV	5.30 V	0.3 A	DC	1.7 kWh/1000h	1.70 W
PL-LIN-Z6 245-940 62X20-HV	5.30 V	0.3 A	DC	1.7 kWh/1000h	1.70 W
PL-LIN-Z6 275-930 70X20-LV	23.8 V	0.075 A	DC	1.9 kWh/1000h	1.90 W
PL-LIN-Z6 275-940 70X20-LV	23.8 V	0.075 A	DC	1.8 kWh/1000h	1.80 W
PL-LIN-Z6 1100-930 280X20-LV/HV	23.8 V	0.3 A	DC	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 1100-940 280X20-LV/HV	23.8 V	0.3 A	DC	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 1100-950 280X20-LV/HV	23.8 V	0.3 A	DC	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 2000-930 280X20-LV/HV	43.2 V	0.3 A	DC	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2000-940 280X20-LV/HV	43.2 V	0.3 A	DC	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2000-950 280X20-LV/HV	43.2 V	0.3 A	DC	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2200-930 560X20-HV	47.7 V	0.3 A	DC	14.9 kWh/1000h	14.90 W
PL-LIN-Z6 2200-930 560X20-LV	23.8 V	0.6 A	DC	15.0 kWh/1000h	15.00 W
PL-LIN-Z6 2200-940 560X20-HV	47.7 V	0.3 A	DC	14.8 kWh/1000h	14.80 W
PL-LIN-Z6 2200-940 560X20-LV	23.8 V	0.6 A	DC	14.5 kWh/1000h	14.50 W
PL-LIN-Z6 2200-950 560X20-HV	47.7 V	0.3 A	DC	14.8 kWh/1000h	14.80 W
PL-LIN-Z6 2200-950 560X20-LV	23.8 V	0.6 A	DC	14.9 kWh/1000h	14.90 W
PL-LIN-Z6 4000-930 560X20-HV	86.5 V	0.3 A	DC	26.8 kWh/1000h	26.80 W
PL-LIN-Z6 4000-930 560X20-LV	43.2 V	0.6 A	DC	26.9 kWh/1000h	26.90 W
PL-LIN-Z6 4000-940 560X20-HV	86.5 V	0.3 A	DC	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-940 560X20-LV	43.2 V	0.6 A	DC	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-950 560X20-HV	86.5 V	0.3 A	DC	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-950 560X20-LV	43.2 V	0.6 A	DC	26.5 kWh/1000h	26.50 W

Product description	Photometrical data			
	Luminous efficacy	Useful luminous flux (Φuse)	Colour consistency (McAdam ellipses)	Correlated color temperature CCT
PL-LIN-Z6 245-930 62X20-HV	145 lm/W	228 lm	3	3000 K
PL-LIN-Z6 245-940 62X20-HV	164 lm/W	249 lm	3	4000 K
PL-LIN-Z6 275-930 70X20-LV	145 lm/W	258 lm	3	3000 K
PL-LIN-Z6 275-940 70X20-LV	164 lm/W	276 lm	3	4000 K
PL-LIN-Z6 1100-930 280X20-LV/HV	145 lm/W	1039 lm	3	3000 K
PL-LIN-Z6 1100-940 280X20-LV/HV	164 lm/W	1123 lm	3	4000 K
PL-LIN-Z6 1100-950 280X20-LV/HV	164 lm/W	1153 lm	3	5000 K
PL-LIN-Z6 2000-930 280X20-LV/HV	140 lm/W	1821 lm	3	3000 K
PL-LIN-Z6 2000-940 280X20-LV/HV	158 lm/W	1969 lm	3	4000 K
PL-LIN-Z6 2000-950 280X20-LV/HV	158 lm/W	2033 lm	3	5000 K
PL-LIN-Z6 2200-930 560X20-HV	145 lm/W	2079 lm	3	3000 K
PL-LIN-Z6 2200-930 560X20-LV	145 lm/W	2079 lm	3	3000 K
PL-LIN-Z6 2200-940 560X20-HV	164 lm/W	2222 lm	3	4000 K
PL-LIN-Z6 2200-940 560X20-LV	164 lm/W	2191 lm	3	4000 K
PL-LIN-Z6 2200-950 560X20-HV	164 lm/W	2304 lm	3	5000 K
PL-LIN-Z6 2200-950 560X20-LV	164 lm/W	2303 lm	3	5000 K

Product family datasheet

Product description	Photometrical data			
	Luminous efficacy	Useful luminous flux (Φuse)	Colour consistency (McAdam ellipses)	Correlated color temperature CCT
PL-LIN-Z6 4000-930 560X20-HV	140 lm/W	3660 lm	3	3000 K
PL-LIN-Z6 4000-930 560X20-LV	140 lm/W	3660 lm	3	3000 K
PL-LIN-Z6 4000-940 560X20-HV	158 lm/W	3902 lm	3	4000 K
PL-LIN-Z6 4000-940 560X20-LV	158 lm/W	3807 lm	3	4000 K
PL-LIN-Z6 4000-950 560X20-HV	158 lm/W	4043 lm	3	5000 K
PL-LIN-Z6 4000-950 560X20-LV	158 lm/W	4055 lm	3	5000 K

Product description	Color rendering index Ra	LED module information	Dimensions & weight		
		Number of LEDs per module	Product weight	Width	Length
PL-LIN-Z6 245-930 62X20-HV	90	8	5.00 g	20.0 mm	62.0 mm
PL-LIN-Z6 245-940 62X20-HV	90	8	5.00 g	20.0 mm	62.0 mm
PL-LIN-Z6 275-930 70X20-LV	90	9	5.00 g	20.0 mm	70.0 mm
PL-LIN-Z6 275-940 70X20-LV	90	9	5.00 g	20.0 mm	70.0 mm
PL-LIN-Z6 1100-930 280X20-LV/HV	90	36	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 1100-940 280X20-LV/HV	90	36	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 1100-950 280X20-LV/HV	90	36	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-930 280X20-LV/HV	90	72	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-940 280X20-LV/HV	90	48	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-950 280X20-LV/HV	90	48	20.00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2200-930 560X20-HV	90	72	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-930 560X20-LV	90	72	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-940 560X20-HV	90	72	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-940 560X20-LV	90	48	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-950 560X20-HV	90	72	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-950 560X20-LV	90	48	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-930 560X20-HV	90	96	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-930 560X20-LV	90	96	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-940 560X20-HV	90	96	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-940 560X20-LV	90	96	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-950 560X20-HV	90	96	40.00 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-950 560X20-LV	90	96	40.00 g	20.0 mm	560.0 mm

Product description	Height	Temperatures & operating conditions			
		Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Maximum temperature at tc test point	Temperature range at storage
PL-LIN-Z6 245-930 62X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 245-940 62X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 275-930 70X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 275-940 70X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 1100-930 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C

Product family datasheet

Product description	Height	Temperatures & operating conditions			
		Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Maximum temperature at tc test point	Temperature range at storage
PL-LIN-Z6 1100-940 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 1100-950 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-930 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-940 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-950 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-930 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-930 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-940 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-940 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-950 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-950 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-930 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-930 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-940 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-940 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-950 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-950 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C

Product description	Ambient temperature range	Lifespan		Additional product data
		L70B50 lifetime	Lumen maintenance factor LMF	Lighting technology used
PL-LIN-Z6 245-930 62X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 245-940 62X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 275-930 70X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 275-940 70X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-930 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-940 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-950 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-930 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-940 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-950 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-930 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-930 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-940 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-940 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-950 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-950 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-930 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-930 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-940 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-940 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-950 560X20-HV	-20...+75 °C	100000 h	96	LED

Product family datasheet

Product description	Ambient temperature range	Lifespan		Additional product data
		L70B50 lifetime	Lumen maintenance factor LMF	Lighting technology used
PL-LIN-Z6 4000-950 560X20-LV	-20...+75 °C	100000 h	96	LED


Product description	Predecessor EAN	Certificates & standards		Logistical data
		Standards	Energy efficiency class	Commodity code
PL-LIN-Z6 245-930 62X20-HV		CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 245-940 62X20-HV		CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 275-930 70X20-LV		CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 275-940 70X20-LV		CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 1100-930 280X20-LV/HV	4052899984899	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 1100-940 280X20-LV/HV	4052899984905	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 1100-950 280X20-LV/HV	4052899984912	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2000-930 280X20-LV/HV	4052899985087	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 2000-940 280X20-LV/HV	4052899985094	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2000-950 280X20-LV/HV	4052899985100	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2200-930 560X20-HV		CE/ENEC/VDE	E	85395100000
PL-LIN-Z6 2200-930 560X20-LV	4052899985278	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 2200-940 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 2200-940 560X20-LV	4052899985285	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2200-950 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 2200-950 560X20-LV	4052899985292	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 4000-930 560X20-HV		CE/ENEC/VDE	E	85395100000
PL-LIN-Z6 4000-930 560X20-LV	4052899985469	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 4000-940 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 4000-940 560X20-LV	4052899985476	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 4000-950 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 4000-950 560X20-LV	4052899985483	CE/ENEC/VDE	D	85414100000

Product description	Environmental information			
	Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-LIN-Z6 245-930 62X20-HV	18-04-2022	4052899607965	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 245-940 62X20-HV	18-04-2022	4052899607972	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 275-930 70X20-LV	18-04-2022	4052899607989	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 275-940 70X20-LV	18-04-2022	4052899607996	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-930 280X20-LV/HV	18-04-2022	4052899606760	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-940 280X20-LV/HV	18-04-2022	4052899606777	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-950 280X20-LV/HV	18-04-2022	4052899606784	No declarable substances contained	No declarable substances contained


Product family datasheet

Product description	Environmental information			
	Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-LIN-Z6 2000-930 280X20-LV/HV	18-04-2022	4052899606791	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2000-940 280X20-LV/HV	10-08-2023	4052899606807	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2000-950 280X20-LV/HV	23-08-2023	4052899606814	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-930 560X20-HV	23-08-2023	4052899606883	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-930 560X20-LV	23-08-2023	4052899606821	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-940 560X20-HV	10-08-2023	4052899606890	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-940 560X20-LV	18-04-2022	4052899606838	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-950 560X20-HV	23-08-2023	4052899606906	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-950 560X20-LV	18-04-2022	4052899606845	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-930 560X20-HV	18-04-2022	4052899606913	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-930 560X20-LV	18-04-2022	4052899606852	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-940 560X20-HV	18-04-2022	4052899606920	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-940 560X20-LV	18-04-2022	4052899606869	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-950 560X20-HV	18-04-2022	4052899606937	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-950 560X20-LV	18-04-2022	4052899606876	No declarable substances contained	No declarable substances contained


Product family datasheet

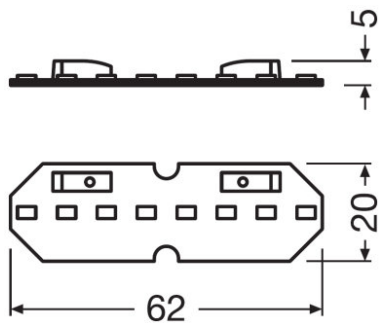


PL-LIN-Z6 245-830 62x20-HV

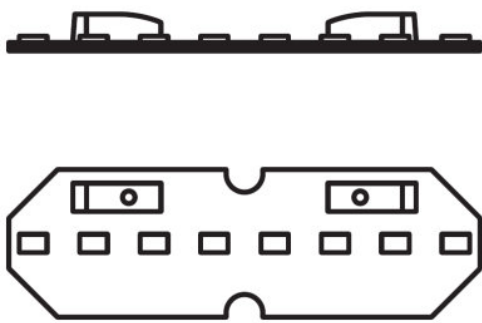


PL-LIN-Z6 245-830 62x20-HV

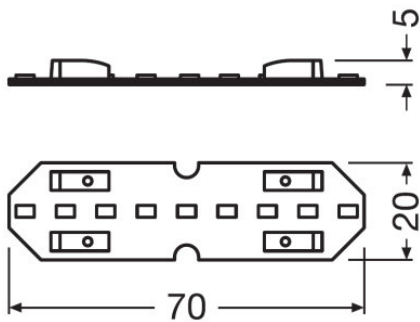


PL-LIN-Z6 275-827 70x20-LV

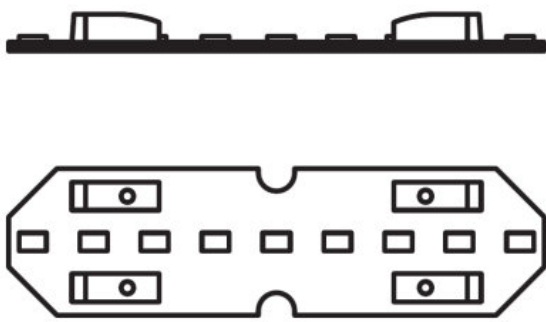


PL-LIN-Z6 275-827 70x20-LV




PL-LIN-Z6 1100-827 280X20-LVHV




PL-LIN-Z6 1100-827 280X20-LVHV

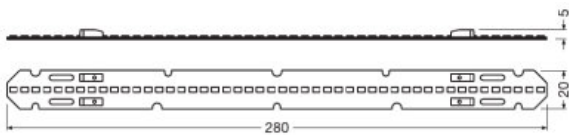


PL-LIN-Z6 2000-827 280X20-LVHV




PL-LIN-Z6 2200-827 560X20-HV




PL-LIN-Z6 2200-827 560X20-HV



PL-LIN-Z6 2200-827 560X20-LV




PL-LIN-Z6 2200-827 560X20-LV



PL-LIN-Z6 4000-827 560X20-HV

Product family datasheet



PL-LIN-Z6 4000-865 560x20-LV

Application advice

For more detailed application information and graphics please see product datasheet.

Additional product information

- When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL LIN Z6 CE 3812352 090823
	CAD data 3-dim PL LIN Z6 245 62x20 HV CADPDF 240220
	CAD data 3-dim PL LIN Z6 275 70x20 LV CADPDF 220819
	CAD data 3-dim PL LIN Z5 Z6 1100 280x20 LV HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 2000 280x20 LV HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 2200 560x20 HV CADPDF 240220

Product family datasheet

	Declarations of conformity EU Declaration of conformity PL-LIN-Z4 family
	Declarations of conformity Declaraton of conformity PL-LIN-Z4
	CAD data 3-dim PL LIN Z5 Z6 2200 560x20 LV CADPDF 240220
	User instruction PrevaLED Linear G5 G6
	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 LV CADPDF 240220

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899607965	PL-LIN-Z6 245-930 62X20-HV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	498.00 g
4052899607972	PL-LIN-Z6 245-940 62X20-HV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	498.00 g
4052899607989	PL-LIN-Z6 275-930 70X20-LV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	466.00 g
4052899607996	PL-LIN-Z6 275-940 70X20-LV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	466.00 g
4052899606760	PL-LIN-Z6 1100-930 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606777	PL-LIN-Z6 1100-940 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606784	PL-LIN-Z6 1100-950 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606791	PL-LIN-Z6 2000-930 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606807	PL-LIN-Z6 2000-940 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g

Product family datasheet

Logistical Data

4052899606814	PL-LIN-Z6 2000-950 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606883	PL-LIN-Z6 2200-930 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606821	PL-LIN-Z6 2200-930 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606890	PL-LIN-Z6 2200-940 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606838	PL-LIN-Z6 2200-940 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606906	PL-LIN-Z6 2200-950 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606845	PL-LIN-Z6 2200-950 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606913	PL-LIN-Z6 4000-930 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606852	PL-LIN-Z6 4000-930 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606920	PL-LIN-Z6 4000-940 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606869	PL-LIN-Z6 4000-940 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606937	PL-LIN-Z6 4000-950 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606876	PL-LIN-Z6 4000-950 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.