

QBM DX LS/PD R

Qualified Bluetooth mesh DEXAL Module | Actuators



Areas of application

- Open offices
- Individual offices
- Conference rooms
- Classrooms
- Storage and break areas
- Stairways
- Toilets

Product family benefits

- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with DEXAL drivers

Product family features

- With/without Daylight and Occupancy Sensor DEXAL Module
- Qualified Bluetooth mesh enabled by Silvair
- Control of DEXAL drivers or DALI drivers with additional DALI bus power supply
- Intended for installation into a standard ½" knockout
- Works with OSRAM Hubsense
- Works with OSRAM DEXAL



Product datasheet

Technical data


Electrical data

Input voltage DC	12...22.5 V ¹⁾
Peak input current	30 mA
Average input current	22 mA
Radio frequency	2.4 GHz
Maximum TX power	+4 dBm
Wireless protocol	Qualified Bluetooth mesh enabled by Silvair ²⁾
Wireless range	10 m line of sight
System wattage	0.50 W
Standby power	< 1W

¹⁾ Powered by DEXAL interface, I < 250 mA

²⁾ See additional product information

Dimensions & weight



Length	52.0 mm
Diameter	32.0 mm
Mounting hole diameter	22.2...23.2 mm
Product weight	18.20 g
Wire preparation length, input side	7...9 mm
Cable cross-section, input side	0.2...0.75 mm ²
Maximum allowed cable length	3 m

Temperatures & operating conditions

Ambient temperature range	0...+50 °C
Permitted rel. humidity during operation	0...85 % ¹⁾
Temperature range at storage	0...60 °C
Permitted relative humidity at storage	0...95 % ¹⁾

Product datasheet

Maximum temperature at tc test point	60 °C
--------------------------------------	-------

¹⁾ Non-condensing

Lifespan

Lifespan	50000 h ¹⁾
----------	-----------------------

¹⁾ ta=50% and 50%RH

Capabilities

Control output	DEXAL
Number of connected drivers	1 ¹⁾
Dimmable	Yes
Type of sensor	Daylight / PIR
Operating range, light sensor	<1000 lx
Detection angle	92 °
Maximum installation height	3 m
Compatibility	Works with OSRAM HubSense / Works with OSRAM DEXAL ²⁾
Status Indicator	Green: network Status / Red: Motion detected
Reset	Magnetic ³⁾

¹⁾ DEXAL LED driver

²⁾ See additional product information

³⁾ by Neodymium magnet



Certificates & standards

Approval marks – approval	CE
Type of protection	IP20
Standards	Acc. to EN 61347-2-11 / Acc. to ETSI EN 301 489 - 1 / Acc. to EN 50581 / Acc. to EN 62479 / Acc. to EN 300 328 / Acc. to EN 301 489-17

Logistical data



Commodity code	853710989900
----------------	--------------

Wiring Diagram

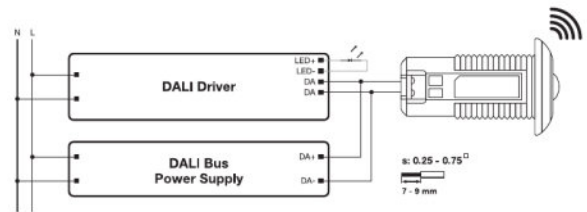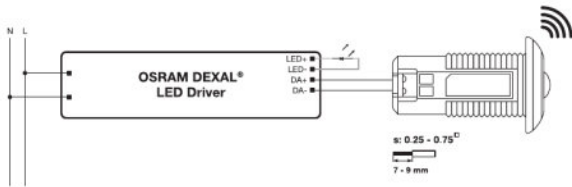

Wiring diagram

Wiring diagram



Others graphics




Others graphics

Product datasheet

Additional product information

- By integration the device into a casing the wireless range could be affected, in particular by metal surfaces. Therefore, the wireless range needs to be verified after integration.
- The device could be reset to factory default by placing a strong Neodym magnet (e.g. N35, d=6.35 mm x h=1.59 mm) near the corner of the bezel for 5 seconds.
- The status LED of the device indicate following Network status. Fast blinking (Green): Not connected to a network, Slow blinking (Green); Connected to a network, Blink twice (Green): Mesh package received, Long blink (Green) Factory reset, Blink one (Red): Motion detected
- The device can be put into operation using the OSRAM HubSense Commissioning Tool (<https://platform.hubsense.eu>), subject to prior acceptance of the Terms of Use and the Privacy Policy.
- OSRAM may terminate or suspend the use of the HubSense Commissioning Tool at any time and for any or no reason in its sole discretion, even if access and use is continued to be allowed to others.
- The device complies with Bluetooth mesh Standard v1.0. It can also be used in 3rd party Bluetooth mesh network that complies with this standard and that supports the mesh models of this device. In order to ensure correct interoperability a verification with the 3rd party network components is necessary in advance. Please contact OSRAM (support@hubsense.eu) to receive the actual list of supported models for this device.

Download Data

File
 User instruction QBM DX
 Declarations of conformity EC-DoC LMS QBM DX family 9C1-3816475-EN-00 2019
 CAD data CAD Data STP QBM DX LS PD R

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172074292	QBM DX LS/PD R	Shipping carton box 36	332 mm x 266 mm x 117 mm	10.33 dm ³	1033.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.