


Lightbar SX300-SP ECE R10, R112

Powerful and durable LED auxiliary light for safe driving pleasure



Compact housing design

Compact mounting dimensions enables a wide range of possible applications




Lighting distance up to 270 meters

Increased far field illumination



Spot Beam

Highly concentrated light beam

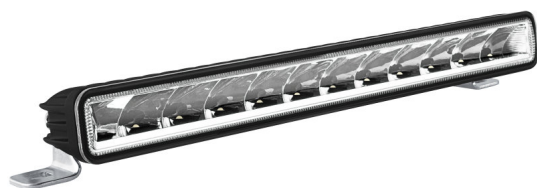

Vibrant LED light for more safety on the road

Unlit streets and dirt roads always present a greater risk for accidents. The LEDriving Lightbar SX300-SP LED auxiliary light not only shines more light in the darkness, it also increases safety in traffic. The LED auxiliary light with approval for use on roads is equipped with 12 high-performance LEDs and gives drivers better visibility. The perception of light is also enhanced for oncoming traffic. The search light therefore contributes to this aspect of road safety. Drivers can identify obstacles or potential hazards far in advance thanks to the beam range of the automotive auxiliary light. With an illuminance of one lux, the beam of light can reach up to 270 meters with a beam angle of eight degrees. The intelligent reflector design of the LED high beam provides extremely high optical efficiency with homogeneous light distribution. This means that oncoming traffic is exposed to less glare from the 2600 lumen LED light. Along with strong light output and improved road safety, the search light also offers visual appeal: It further enhances the unique off-road look of the vehicle. Ruggedness and durability for on and off-road use. Strong jolts and harsh weather conditions present major challenges for the material. To ensure a longer lifespan, the LED auxiliary light is therefore equipped with a hard-wearing polycarbonate lens that meets the toughest demands. The LEDriving Lightbar SX300-SP LED auxiliary light works dependably even at extreme temperatures of -30 to 60 degrees Celsius. That makes it the ideal companion, especially for off-road driving. The integrated driver and thermal management system protects the high-performance LEDs from possible overheating. In addition, over and under voltage protection prevents power from exceeding a defined current over a certain amount of time. Compact mounting dimensions mean that the LED auxiliary light can be used in a wide range of applications. Not only 4x4 and off-road vehicles, but utility and industrial vehicles can also benefit from the increased light output of the LED auxiliary light.

Product datasheet

Technical data

Product information

Order reference	LEDDL106-SP
Product type (off-road vs. on-road)	On-road
Application (Category and Product specific)	Additional high beam application


Electrical data

Nominal voltage	12/24 V
Nominal wattage	30 W
Test voltage	13.5 V

Photometrical data

Luminous flux	2600 lm
Color temperature	6000 K
Light distance at 1lx	270 m

Dimensions & weight



Product weight	700.00 g
Length	350.0 mm
Width	62.0 mm
Height	38.0 mm

Lifespan

Lifespan Tc	5000 h
Guarantee	5 years

Additional product data

Connector to lamp	DT Connector
-------------------	--------------

Product datasheet

Capabilities

Technology	LED
------------	-----

Certificates & standards

ECE category	ECE R10, R112
Approval marks – approval	E4 approval
Type of protection	IP67

Country specific categorizations

Order reference	LEDDL106-SP
-----------------	-------------

Logistical data



Commodity code	851220009000
----------------	--------------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899595439	LEDriving SX	Folding carton box 1	387 mm x 137 mm x 89 mm	4.72 dm ³	883.00 g
4052899595446	LEDriving SX	Shipping carton box 4	407 mm x 296 mm x 208 mm	25.06 dm ³	4072.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	User instruction LEDriving
	Movie application LEDriving driving & working lights in application (EN)

Legal advice

In vehicles with 12/24 volts, auxiliary lights must be installed in pairs

Precise terms and conditions at: www.osram.com/guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.