


OPTOTRONIC Intelligent – DALI NFC S

Compact constant current LED driver – Dimmable

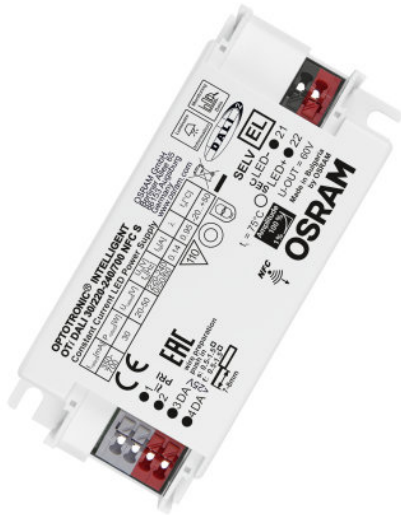

Areas of application

- Suitable for downlights, spotlights and LED panels
- Suitable for use in luminaires with flexible current setting
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for indoor SELV installations
- Suitable for luminaires of protection classes I and II

Product family benefits

- Versatile DALI window driver due to flexible output characteristic
- Locking and unlocking of luminaire/driver data
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1...100 % by amplitude dimming
- DALI-2 certified incl. Parts 251, 252, 253



Product family datasheet

Product family features

- Supply voltage: 220...240 V
- Line frequency: 0 Hz, 50...60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression: to EN 55015/CISPR 15
- Immunity according to EN 61547
- Type of protection: IP20

Product family datasheet

Technical data

Electrical data

Product description	Nominal input voltage	Mains frequency	Input voltage AC	Input voltage DC	Total harmonic distortion	Power factor λ
OTi DALI 10/220...240/700 NFC	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	15 % ²⁾	0.49C...0.97 ³⁾
OTi DALI 20/220...240/500 NFC S	220...240 V	0...60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ¹⁰⁾	0.63C...0.95
OTi DALI 30/220...240/700 NFC S	220...240 V	0...60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ¹⁰⁾	0.71C...0.97
OTi DALI 40/220...240/1A0 NFC S	220...240 V	0...60 Hz	198...264 V ¹⁾	176...276 V	< 10 % ¹⁰⁾	0.85C...0.98

Product description	Efficiency in full-load	Device power loss	Inrush current	Max. ECG no. on circuit breaker 10 A (B)	Max. ECG no. on circuit breaker 16 A (B)
OTi DALI 10/220...240/700 NFC	82 % ⁴⁾	3.5 W	< 5 A ⁵⁾	80	130
OTi DALI 20/220...240/500 NFC S	88 % ⁴⁾		< 20 A ¹¹⁾	20	30
OTi DALI 30/220...240/700 NFC S	90 % ⁴⁾		< 20 A ¹¹⁾	20	30
OTi DALI 40/220...240/1A0 NFC S	91 % ⁴⁾		< 20 A ¹¹⁾	20	30

Product description	Max. ECG no. on circuit breaker 25 A (B)	Surge capability (L/N-Ground)	Surge capability (L-N)	Nominal output voltage	U-OUT (working voltage)
OTi DALI 10/220...240/700 NFC	-	2 kV	1 kV	2.5...45 V ⁶⁾	60 V
OTi DALI 20/220...240/500 NFC S		2 kV	1 kV	20...50 V ⁶⁾	60 V
OTi DALI 30/220...240/700 NFC S		2 kV	1 kV	20...50 V ⁶⁾	60 V
OTi DALI 40/220...240/1A0 NFC S		2 kV	1 kV	20...50 V ⁶⁾	60 V

Product description	Nominal output current	Default output current	Output current tolerance	Output ripple current (100 Hz)
OTi DALI 10/220...240/700 NFC	150...700 mA ⁷⁾	350 mA	±3 %	< 2 % ⁸⁾
OTi DALI 20/220...240/500 NFC S	200...500 mA ¹²⁾	350 mA	±5 %	< 5 % ⁸⁾
OTi DALI 30/220...240/700 NFC S	350...700 mA ¹²⁾	500 mA	±5 %	< 5 % ⁸⁾
OTi DALI 40/220...240/1A0 NFC S	500...1050 mA ¹²⁾	700 mA	±5 %	< 5 % ⁸⁾

Product description	Output PSTLM	Output SVM	Nominal output power	Maximum output power
OTi DALI 10/220...240/700 NFC	≤1	≤0.4	10 W ⁹⁾	10 W
OTi DALI 20/220...240/500 NFC S	≤1	≤0.4	20 W ¹³⁾	20 W
OTi DALI 30/220...240/700 NFC S	≤1	≤0.4	30 W ¹⁴⁾	30 W
OTi DALI 40/220...240/1A0 NFC S	≤1	≤0.4	40 W ¹⁵⁾	40 W

Product family datasheet

Product description	Galvanic isolation DALI/mains	Networked standby power	Galvanic isolation primary/secondary	Power loss in stand-by mode
OTi DALI 10/220...240/700 NFC	Basic	$\leq 0.15 \text{ W}^{4)}$	SELV	$\leq 0.15 \text{ W}$
OTi DALI 20/220...240/500 NFC S	Basic	$\leq 0.18 \text{ W}^{4)}$	SELV	$< 0.15 \text{ W}$
OTi DALI 30/220...240/700 NFC S	Basic	$\leq 0.18 \text{ W}^{4)}$	SELV	$< 0.15 \text{ W}$
OTi DALI 40/220...240/1A0 NFC S	Basic	$\leq 0.18 \text{ W}^{4)}$	SELV	$< 0.15 \text{ W}$

Product description	Galvanic isolation DALI/output	Current set
OTi DALI 10/220...240/700 NFC	SELV	DALI / NFC
OTi DALI 20/220...240/500 NFC S	SELV	DALI / NFC
OTi DALI 30/220...240/700 NFC S	SELV	DALI / NFC
OTi DALI 40/220...240/1A0 NFC S	SELV	DALI / NFC

1) Permitted voltage range

2) At full load, 220...240 V, 50 Hz

3) Full load at 220...240 V_{AC}/50 Hz

4) at 230 V, 50 Hz

5) $t_{\text{width}} = 100 \mu\text{s}$ (measured at 50 % I_{peak})

6) Maximum 60 V

7) $\pm 3\%$

8) Ripple average at 100 Hz

9) Partial load 1.5...10 W

10) At full load, 220...240 V, 50 Hz / see graphs

11) $t_{\text{width}} = 200 \mu\text{s}$ (measured at 50 % I_{peak})

12) $\pm 5\%$

13) Partial load 4...20 W

14) Partial load 10...30 W

15) Partial load 20...40 W

Dimensions & weight

Product description	Mounting hole spacing, length	Product weight	Cable cross-section, input side	Cable cross-section, output side	Wire preparation length, input side
OTi DALI 10/220...240/700 NFC	115.0 mm	58.00 g	0.5...1.5 mm ^{2 1)}	0.5...1.5 mm ^{2 1)}	7...8 mm
OTi DALI 20/220...240/500 NFC S	88.0 mm	110.00 g	0.2...1.5 mm ^{2 1)}	0.2...1.5 mm ^{2 1)}	8.0...9.0 mm
OTi DALI 30/220...240/700 NFC S	88.0 mm	110.00 g	0.2...1.5 mm ^{2 1)}	0.2...1.5 mm ^{2 1)}	8.0...9.0 mm
OTi DALI 40/220...240/1A0 NFC S	88.0 mm	120.00 g	0.2...1.5 mm ^{2 1)}	0.2...1.5 mm ^{2 1)}	8.0...9.0 mm


Product description	Wire preparation length, output side	Height	Length	Width	Mounting hole spacing, width
OTi DALI 10/220...240/700 NFC	7...8 mm	21.0 mm	124.0 mm	31.0 mm	
OTi DALI 20/220...240/500 NFC S	8.0...9.0 mm	29.5 mm	97.0 mm	43.0 mm	34.0 mm
OTi DALI 30/220...240/700 NFC S	8.0...9.0 mm	29.5 mm	97.0 mm	43.0 mm	34.0 mm

Product family datasheet

Product description	Wire preparation length, output side	Height	Length	Width	Mounting hole spacing, width
OTi DALI 40/220...240/1A0 NFC S	8.0...9.0 mm	29.5 mm	97.0 mm	43.0 mm	34.0 mm

1) Solid or flexible leads

Product line drawing

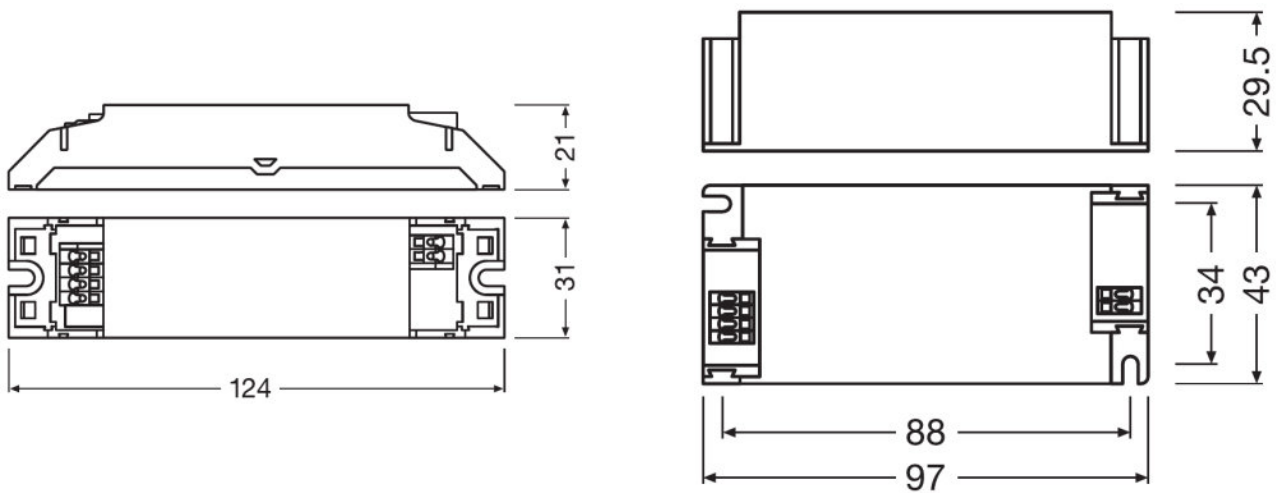

OTi DALI 10/220...240/700 NFC

OTi DALI 20/220...240/500 NFC S, OTi DALI 30/220...240/700 NFC S, OTi DALI 40/220...240/1A0 NFC S

Colors & materials

Product description	Casing material
OTi DALI 10/220...240/700 NFC	Plastic
OTi DALI 20/220...240/500 NFC S	Plastic
OTi DALI 30/220...240/700 NFC S	Plastic
OTi DALI 40/220...240/1A0 NFC S	Plastic

Product family datasheet

Temperatures & operating conditions

Product description	Ambient temperature range	Maximum temperature at tc test point	Max.housing temperature in case of fault	Temperature range at storage
OTi DALI 10/220...240/700 NFC	-20...+50 °C	75 °C ¹⁾	110 °C	-40...+85 °C
OTi DALI 20/220...240/500 NFC S	-20...+50 °C	75 °C ¹⁾	110 °C	-25...85 °C
OTi DALI 30/220...240/700 NFC S	-20...+50 °C	75 °C ¹⁾	110 °C	-25...85 °C
OTi DALI 40/220...240/1A0 NFC S	-20...+50 °C	85 °C ¹⁾	110 °C	-25...85 °C

Product description	Permitted rel. humidity during operation
OTi DALI 10/220...240/700 NFC	5...85 % ²⁾
OTi DALI 20/220...240/500 NFC S	5...85 % ²⁾
OTi DALI 30/220...240/700 NFC S	5...85 % ²⁾
OTi DALI 40/220...240/1A0 NFC S	5...85 % ²⁾

¹⁾ Maximum at the Tc-point

²⁾ Maximum 56 days/year at 85 %

Lifespan

Product description	ECG lifetime
OTi DALI 10/220...240/700 NFC	50000 / 100000 h ¹⁾
OTi DALI 20/220...240/500 NFC S	50000 / 100000 h ¹⁾
OTi DALI 30/220...240/700 NFC S	50000 / 100000 h ¹⁾
OTi DALI 40/220...240/1A0 NFC S	50000 / 100000 h ²⁾

¹⁾ $T_c = 75^\circ\text{C}, 0.2\% / 1,000 \text{ h failure rate} / T_c = 65^\circ\text{C}, 0.1\% / 1,000 \text{ h failure rate}$

²⁾ $T_c = 85^\circ\text{C}, 0.2\% / 1,000 \text{ h failure rate} / T_c = 75^\circ\text{C}, 0.1\% / 1,000 \text{ h failure rate}$

Additional product data

Product description	Encapsulated	Successor EAN	Predecessor EAN
OTi DALI 10/220...240/700 NFC	No	4062172250269	4052899562639
OTi DALI 20/220...240/500 NFC S			
OTi DALI 30/220...240/700 NFC S			
OTi DALI 40/220...240/1A0 NFC S			

Capabilities

Product description	Dimmable	Dimming interface	Dimming range	Dimming method
OTi DALI 10/220...240/700 NFC	Yes	DALI-2	1...100 %	Amplitude Modulation
OTi DALI 20/220...240/500 NFC S	Yes	DALI-2	1...100 %	Amplitude Modulation
OTi DALI 30/220...240/700 NFC S	Yes	DALI-2	1...100 %	Amplitude Modulation
OTi DALI 40/220...240/1A0 NFC S	Yes	DALI-2	1...100 %	Amplitude Modulation

Product family datasheet

Product description	Overheating protection	Overload protection	Short-circuit protection	No-load proof
OTi DALI 10/220...240/700 NFC	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 20/220...240/500 NFC S	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 30/220...240/700 NFC S	Automatic reversible	Automatic reversible	Automatic reversible	Yes
OTi DALI 40/220...240/1A0 NFC S	Automatic reversible	Automatic reversible	Automatic reversible	Yes

Product description	Intended for no-load operation	Max. cable length to lamp/LED module	Suitable for fixtures with prot. class	Type of connection, input side
OTi DALI 10/220...240/700 NFC	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 20/220...240/500 NFC S	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 30/220...240/700 NFC S	No	2.0 m ¹⁾	I / II	Push terminal
OTi DALI 40/220...240/1A0 NFC S	No	2.0 m ¹⁾	I / II	Push terminal

Product description	Type of connection, output side	Control interface	Number of channels
OTi DALI 10/220...240/700 NFC	Push terminal	DALI	1
OTi DALI 20/220...240/500 NFC S	Push terminal	DALI	1
OTi DALI 30/220...240/700 NFC S	Push terminal	DALI	1
OTi DALI 40/220...240/1A0 NFC S	Push terminal	DALI	1

Product description	DALI-2 Diagnostic Data	DALI-2 Energy Data	Constant lumen function	Suitable for emergency lighting
OTi DALI 10/220...240/700 NFC	Yes ²⁾	Yes ³⁾	Programmable	Yes
OTi DALI 20/220...240/500 NFC S	Yes ²⁾	Yes ³⁾	Programmable	Yes
OTi DALI 30/220...240/700 NFC S	Yes ²⁾	Yes ³⁾	Programmable	Yes
OTi DALI 40/220...240/1A0 NFC S	Yes ²⁾	Yes ³⁾	Programmable	Yes

Product description	Programming interface	Suitable for through-wiring
OTi DALI 10/220...240/700 NFC	DALI, NFC	
OTi DALI 20/220...240/500 NFC S	DALI, NFC	No
OTi DALI 30/220...240/700 NFC S	DALI, NFC	No
OTi DALI 40/220...240/1A0 NFC S	DALI, NFC	No

¹⁾ Output wires must be routed as close as possible to each other

²⁾ Acc. DALI part 253

³⁾ Acc. DALI part 252

Programming

Product description	Tuner4TRONIC	Tuner4TRONIC Field App	Programming device
OTi DALI 10/220...240/700 NFC	Yes	Yes	DALI / NFC
OTi DALI 20/220...240/500 NFC S	Yes	Yes	DALI / NFC
OTi DALI 30/220...240/700 NFC S	Yes	Yes	DALI / NFC
OTi DALI 40/220...240/1A0 NFC S	Yes	Yes	DALI / NFC

Product family datasheet

Product description	Box programming
OTi DALI 10/220...240/700 NFC	
OTi DALI 20/220...240/500 NFC S	Yes
OTi DALI 30/220...240/700 NFC S	Yes
OTi DALI 40/220...240/1A0 NFC S	Yes

Programmable features

Product description	DALI-2 Luminaire Data	Emergency Mode	DALI Settings
OTi DALI 10/220...240/700 NFC	Yes ¹⁾	Yes	Yes
OTi DALI 20/220...240/500 NFC S	Yes ¹⁾	Yes	Yes
OTi DALI 30/220...240/700 NFC S	Yes ¹⁾	Yes	Yes
OTi DALI 40/220...240/1A0 NFC S	Yes ¹⁾	Yes	Yes

Product description	Driver Guard	Lamp Operating Time	Constant Lumen
OTi DALI 10/220...240/700 NFC	Yes	Yes	Yes
OTi DALI 20/220...240/500 NFC S	Yes	Yes	Yes
OTi DALI 30/220...240/700 NFC S	Yes	Yes	Yes
OTi DALI 40/220...240/1A0 NFC S	Yes	Yes	Yes

Product description	Operating Current	OEM Key	Corridor Functionality
OTi DALI 10/220...240/700 NFC	Yes	No	No
OTi DALI 20/220...240/500 NFC S	Yes	No	No
OTi DALI 30/220...240/700 NFC S	Yes	No	No
OTi DALI 40/220...240/1A0 NFC S	Yes	No	No

Product description	TouchDIM + Sensor	Dim to Dark	Soft Switch Off
OTi DALI 10/220...240/700 NFC	No	Yes	Yes
OTi DALI 20/220...240/500 NFC S	No	Yes	Yes
OTi DALI 30/220...240/700 NFC S	No	Yes	Yes
OTi DALI 40/220...240/1A0 NFC S	No	Yes	Yes

Product description	Configuration Lock
OTi DALI 10/220...240/700 NFC	Yes
OTi DALI 20/220...240/500 NFC S	Yes
OTi DALI 30/220...240/700 NFC S	Yes
OTi DALI 40/220...240/1A0 NFC S	Yes

¹⁾ Acc. DALI part 251

Product family datasheet

Certificates & standards

Product description	Approval marks – approval	Standards	Protection class	Type of protection
OTi DALI 10/220...240/700 NFC	ENEC 10 / VDE / EMC / EL / CE / DALI-2 / CCC	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 20/220...240/500 NFC S	CE / EL / DALI-2 / EAC / CCC / ENEC	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 30/220...240/700 NFC S	CE / EL / DALI-2 / EAC	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20
OTi DALI 40/220...240/1A0 NFC S	CE / EL / DALI-2 / EAC	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1	II	IP20

Logistical data

Product description	Commodity code
OTi DALI 10/220...240/700 NFC	850440839000
OTi DALI 20/220...240/500 NFC S	850440839000
OTi DALI 30/220...240/700 NFC S	850440839000
OTi DALI 40/220...240/1A0 NFC S	850440839000

Product family datasheet

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
OTi DALI 10/220...240/700 NFC	25-04-2023	4062172143899	Lead
OTi DALI 20/220...240/500 NFC S	28-04-2023	4062172110068	Lead
OTi DALI 30/220...240/700 NFC S	21-04-2023	4062172110082	Lead
OTi DALI 40/220...240/1A0 NFC S	21-04-2023	4062172110105	Lead

Product description	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OTi DALI 10/220...240/700 NFC	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	09356ee8-bde8-422c-8724-9486e8fb10fa
OTi DALI 20/220...240/500 NFC S	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	65eb4a13-3136-4e8c-bd01-b083d4e8a210
OTi DALI 30/220...240/700 NFC S	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	f57c30ed-2cca-47e9-b548-ac89b1d953b6
OTi DALI 40/220...240/1A0 NFC S	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	a38a5978-c182-4edb-aec5-4e0524af57e6




Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File
 User instruction OPTOTRONIC LED Power Supply
 User instruction OPTOTRONIC LED Power Supply
 Certificates OT EMC 40050085 200220

Product family datasheet

	Certificates OTI DALI 10 NFC EATON AM29184 210720
	Certificates OTI DALI 10 NFC INOTEC AM29184 210720
	Certificates OT ENEC 40038447 130722
	Certificates OT EMC 40044675 031022
	Declarations of conformity OTI DALI NFC UK DoC 4291512 240221
	Declarations of conformity OTI DALI NFC CE 3758701 200821
	CAD data OTI DALI 10 NFC IGS 140120
	CAD data OTI DALI 10 NFC STEP 140120
	CAD Data 2-dim OTI DALI 10 NFC CAD2PDF 140120
	CAD data 3-dim OTI DALI 10 NFC CAD3PDF 140120
	User instruction OPTOTRONIC LED Power Supply
	Certificates OTI DALI NFC S CB DE1 63171 270220
	Certificates OTI DALI 20 NFC S EATON AM31177 050320
	Certificates OTI DALI 20 NFC S INOTEC AM31177 050320
	Certificates OTI DALI NFC S RCM CS10925N 180821
	Declarations of conformity OTI DALI NFC S I CE 4169161 110222
	Declarations of conformity OTI DALI NFC S I UK DoC 4281113 110222
	CAD data OTI DALI NFC S IGS 140220
	CAD data OTI DALI NFC S STEP 140220
	CAD Data 2-dim OTI DALI NFC S CAD2PDF 140220
	CAD data 3-dim OTI DALI NFC S CAD3PDF 140220
	Certificates OTI DALI 30 NFC S EATON AM31184 050320
	Certificates OTI DALI 30 NFC S INOTEC AM31184 050320

Product family datasheet



Certificates
OTI DALI 40 NFC S EATON AM31183 050320



Certificates
OTI DALI 40 NFC S INOTEC AM31183 050320

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172143899	OTi DALI 10/220...240/700 NFC	Shipping carton box 20	165 mm x 258 mm x 71 mm	3.02 dm ³	1416.00 g
4062172110068	OTi DALI 20/220...240/500 NFC S	Shipping carton box 20	208 mm x 158 mm x 107 mm	3.52 dm ³	2315.00 g
4062172110082	OTi DALI 30/220...240/700 NFC S	Shipping carton box 20	208 mm x 158 mm x 107 mm	3.52 dm ³	2315.00 g
4062172110105	OTi DALI 40/220...240/1A0 NFC S	Shipping carton box 20	208 mm x 158 mm x 107 mm	3.52 dm ³	2515.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
OTi DALI 10/220...240/700 NFC	OT CABLE CLAMP N-STYLE	▶ 4062172046732

Data privacy

Product family datasheet

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.