

TEC Flex Protect Shortpitch 2000

LED modules for semi-professional applications

Product family features

- Flexible and cuttable LED strip
- Luminous flux: up to 2,000 lm/m
- Available with color temperature: 2,700K, 3,000 K, 4,000 K, 5,000 K or 6,500 K
- Up to 50,000 hrs lifetime @ tc max
- Recommended in system use with OPTOTRONIC
- Color consistency in 3 SDCM

Product family benefits

- High homogeneity thanks to small LED pitch
- Pre-wired LED strip, simple and quick plug-and-play installation
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Type of protection: IP66
- Dimmable (with suitable PWM dimming methods)

Areas of application

- Cove lighting
- Shelf lighting for retail, shops, supermarkets
- For use in architectural, shop and interior luminaires
- Offices, corridors and residential interiors
- Architectural Integration – e.g. coves, walls
- Wet or damp areas



Product family datasheet

Technical data

Electrical data

Product description	Nominal voltage	Type of current	Nominal wattage per meter	Rated wattage	Input voltage range	Accidental reverse input voltage protection up to
TFP2000S-G1 -827-05	24.0 V	DC	15.5 W	77.50 W	23...25 V	25 V
TFP2000S-G1 -830-05	24.0 V	DC	15.5 W	77.50 W	23...25 V	25 V
TFP2000S-G1 -840-05	24.0 V	DC	15.5 W	77.50 W	23...25 V	25 V
TFP2000S-G1 -850-05	24.0 V	DC	15.5 W	77.50 W	23...25 V	25 V
TFP2000S-G1 -865-05	24.0 V	DC	15.5 W	77.50 W	23...25 V	25 V
TFP2000S-G1 -927-04	24.0 V	DC	17.3 W	69.20 W	23...25 V	25 V
TFP2000S-G1 -930-04	24.0 V	DC	17.3 W	69.20 W	23...25 V	25 V
TFP2000S-G1 -935-04	24.0 V	DC	17.3 W	69.20 W	23...25 V	25 V
TFP2000S-G1 -940-04	24.0 V	DC	17.3 W	69.20 W	23...25 V	25 V

Photometrical data

Product description	Light color LED	Color rendering index Ra	Luminous flux per meter	Total useful luminous flux	Luminous efficacy	Standard deviation of color matching
TFP2000S-G1 -827-05	White	80	1690 lm	8450 lm	190 lm/W	≤3 sdc
TFP2000S-G1 -830-05	White	80	1910 lm	9550 lm	123.2 lm/W	≤3 sdc
TFP2000S-G1 -840-05	White	80	1920 lm	9600 lm	123.9 lm/W	≤3 sdc
TFP2000S-G1 -850-05	White	80	1960 lm	9800 lm	126.5 lm/W	≤3 sdc
TFP2000S-G1 -865-05	White	80	1940 lm	9700 lm	125.2 lm/W	≤3 sdc
TFP2000S-G1 -927-04	White	90		6680 lm	96.5 lm/W	≤3 sdc
TFP2000S-G1 -930-04	White	90		7200 lm	104 lm/W	≤3 sdc
TFP2000S-G1 -935-04	White	90		7220 lm	104.3 lm/W	≤3 sdc
TFP2000S-G1 -940-04	White	90		7280 lm	105.2 lm/W	≤3 sdc

Product description	Light color (designation)
TFP2000S-G1 -827-05	White
TFP2000S-G1 -830-05	White
TFP2000S-G1 -840-05	White
TFP2000S-G1 -850-05	White
TFP2000S-G1 -865-05	White
TFP2000S-G1 -927-04	2700 K
TFP2000S-G1 -930-04	3000 K
TFP2000S-G1 -935-04	3500 K
TFP2000S-G1 -940-04	4000 K

Product family datasheet

Light technical data

Product description	LED pitch	Rated beam angle (half peak value)	Starting time	Warm-up time (60 %)
TFP2000S-G1 -827-05	7.14 mm	120.00 °	< 0.5 s	0.00 s
TFP2000S-G1 -830-05	7.14 mm	120.00 °	< 0.5 s	0.00 s
TFP2000S-G1 -840-05	7.14 mm	120.00 °	< 0.5 s	0.00 s
TFP2000S-G1 -850-05	7.14 mm	120.00 °	< 0.5 s	0.00 s
TFP2000S-G1 -865-05	7.14 mm	120.00 °	< 0.5 s	0.00 s
TFP2000S-G1 -927-04	7.14 mm	120.00 °	< 0.5 s	< 0.50 s
TFP2000S-G1 -930-04	7.14 mm	120.00 °	< 0.5 s	< 0.50 s
TFP2000S-G1 -935-04	7.14 mm	120.00 °	< 0.5 s	< 0.50 s
TFP2000S-G1 -940-04	7.14 mm	120.00 °	< 0.5 s	< 0.50 s

LED module information



Product description	Number of LEDs per meter	Number of LEDs per smallest unit
TFP2000S-G1 -827-05	140	7
TFP2000S-G1 -830-05	140	7
TFP2000S-G1 -840-05	140	7
TFP2000S-G1 -850-05	140	7
TFP2000S-G1 -865-05	140	7
TFP2000S-G1 -927-04	140	7
TFP2000S-G1 -930-04	140	7
TFP2000S-G1 -935-04	140	7
TFP2000S-G1 -940-04	140	7

Dimensions & weight

Product description	Length	Length – smallest unit	Height	Product weight
TFP2000S-G1 -827-05	5000 mm	50.0 mm	4.10 mm	278.00 g
TFP2000S-G1 -830-05	5000 mm	50.0 mm	4.10 mm	278.00 g
TFP2000S-G1 -840-05	5000 mm	50.0 mm	4.10 mm	278.00 g
TFP2000S-G1 -850-05	5000 mm	50.0 mm	4.10 mm	278.00 g
TFP2000S-G1 -865-05	5000 mm	50.0 mm	4.10 mm	278.00 g
TFP2000S-G1 -927-04	4020 mm	50.0 mm	4.10 mm	227.00 g
TFP2000S-G1 -930-04	4020 mm	50.0 mm	4.10 mm	227.00 g
TFP2000S-G1 -935-04	4020 mm	50.0 mm	4.10 mm	227.00 g
TFP2000S-G1 -940-04	4020 mm	50.0 mm	4.10 mm	227.00 g

Product family datasheet

Product line drawing

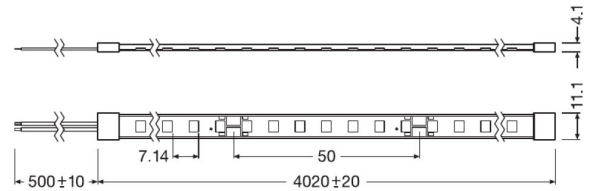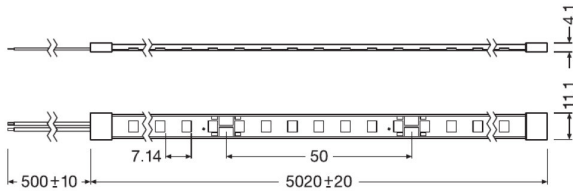

TFP2000S-G1 -827-05, TFP2000S-G1 -830-05, TFP2000S-G1 -840-05, TFP2000S-G1 -850-05, TFP2000S-G1 -865-05

TFP2000S-G1 -927-04, TFP2000S-G1 -930-04, TFP2000S-G1 -935-04, TFP2000S-G1 -940-04

Temperatures & operating conditions

Product description	Performance temp. acc. to IEC 62717	Temperature range in operation at Tc point	Ambient temperature range	Temperature range at storage
TFP2000S-G1 -827-05	35 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -830-05	35 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -840-05	35 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -850-05	35 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -865-05	35 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -927-04	61 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -930-04	61 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -935-04	61 °C	-25...80 °C	-25...+50 °C	-30...85 °C
TFP2000S-G1 -940-04	61 °C	-25...80 °C	-25...+50 °C	-30...85 °C

Product family datasheet

Lifespan

Product description	Rated lamp life time	Nominal lamp life time	Lumen main. fact. at end of nom. life time	Number of switching cycles
TFP2000S-G1 -827-05	50000 h	50000 h	0.70	30000
TFP2000S-G1 -830-05	50000 h	50000 h	0.70	30000
TFP2000S-G1 -840-05	50000 h	50000 h	0.70	30000
TFP2000S-G1 -850-05	50000 h	50000 h	0.70	30000
TFP2000S-G1 -865-05	50000 h	50000 h	0.70	30000
TFP2000S-G1 -927-04	50000 h	50000 h	0.70	30000
TFP2000S-G1 -930-04	50000 h	50000 h	0.70	30000
TFP2000S-G1 -935-04	50000 h	50000 h	0.70	30000
TFP2000S-G1 -940-04	50000 h	50000 h	0.70	30000

Additional product data

Product description	Predecessor EAN	ID of contained light source
TFP2000S-G1 -827-05	4062172091404	LS_SHZ_600300
TFP2000S-G1 -830-05	4062172091428	LS_SHZ_600363
TFP2000S-G1 -840-05	4062172091466	LS_SHZ_600364
TFP2000S-G1 -850-05	4062172091480	LS_SHZ_600365
TFP2000S-G1 -865-05	4062172091527	LS_SHZ_600366
TFP2000S-G1 -927-04		LS_SHZ_601081
TFP2000S-G1 -930-04		LS_SHZ_601082
TFP2000S-G1 -935-04		LS_SHZ_601083
TFP2000S-G1 -940-04		LS_SHZ_601084

Capabilities

Product description	Dimmable	Lowest bending radius	Self-adhesive
TFP2000S-G1 -827-05	Yes	50 mm	Yes
TFP2000S-G1 -830-05	Yes	50 mm	Yes
TFP2000S-G1 -840-05	Yes	50 mm	Yes
TFP2000S-G1 -850-05	Yes	50 mm	Yes
TFP2000S-G1 -865-05	Yes	50 mm	Yes
TFP2000S-G1 -927-04	Yes	50 mm	Yes
TFP2000S-G1 -930-04	Yes	50 mm	Yes
TFP2000S-G1 -935-04	Yes	50 mm	Yes
TFP2000S-G1 -940-04	Yes	50 mm	Yes

Product description	With connection set	With end piece
TFP2000S-G1 -827-05	No	Yes
TFP2000S-G1 -830-05	No	Yes
TFP2000S-G1 -840-05	No	Yes
TFP2000S-G1 -850-05	No	Yes

Product family datasheet

Product description	With connection set	With end piece
TFP2000S-G1 -865-05	No	Yes
TFP2000S-G1 -927-04	No	Yes
TFP2000S-G1 -930-04	No	Yes
TFP2000S-G1 -935-04	No	Yes
TFP2000S-G1 -940-04	No	Yes

Certificates & standards

Product description	Energy consumption	Standards	Type of protection	Energy efficiency class of the contained light source
TFP2000S-G1 -827-05	86 kWh/1000h	CE/ENEC/EAC	IP66	F
TFP2000S-G1 -830-05	86 kWh/1000h	CE/ENEC/EAC	IP66	E
TFP2000S-G1 -840-05	86 kWh/1000h	CE/ENEC/EAC	IP66	E
TFP2000S-G1 -850-05	86 kWh/1000h	CE/ENEC/EAC	IP66	E
TFP2000S-G1 -865-05	86 kWh/1000h	CE/ENEC/EAC	IP66	E
TFP2000S-G1 -927-04		CE/ENEC/EAC/SASO 2927:2019	IP66	F
TFP2000S-G1 -930-04		CE/ENEC/EAC/SASO 2927:2019	IP66	F
TFP2000S-G1 -935-04		CE/ENEC/EAC/SASO 2927:2019	IP66	F
TFP2000S-G1 -940-04		CE/ENEC/EAC/SASO 2927:2019	IP66	F

Logistical data

Product description	Commodity code
TFP2000S-G1 -827-05	940542319000
TFP2000S-G1 -830-05	940542319000
TFP2000S-G1 -840-05	940542319000
TFP2000S-G1 -850-05	940542319000
TFP2000S-G1 -865-05	940542319000
TFP2000S-G1 -927-04	940542319000
TFP2000S-G1 -930-04	940542319000
TFP2000S-G1 -935-04	940542319000
TFP2000S-G1 -940-04	940542319000

Product family datasheet

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TFP2000S-G1 -827-05	13-05-2022	4062172134576	No declarable substances contained
TFP2000S-G1 -830-05	13-05-2022	4062172134590	No declarable substances contained
TFP2000S-G1 -840-05	13-05-2022	4062172134613	No declarable substances contained
TFP2000S-G1 -850-05	13-05-2022	4062172134637	No declarable substances contained
TFP2000S-G1 -865-05	13-05-2022	4062172134651	No declarable substances contained
TFP2000S-G1 -927-04	18-04-2022	4062172268684	No declarable substances contained
TFP2000S-G1 -930-04	18-04-2022	4062172268707	No declarable substances contained
TFP2000S-G1 -935-04	18-04-2022	4062172268721	No declarable substances contained
TFP2000S-G1 -940-04	18-04-2022	4062172268745	No declarable substances contained

Product description	Declaration No. in SCIP database
TFP2000S-G1 -827-05	No declarable substances contained
TFP2000S-G1 -830-05	No declarable substances contained
TFP2000S-G1 -840-05	No declarable substances contained
TFP2000S-G1 -850-05	No declarable substances contained
TFP2000S-G1 -865-05	No declarable substances contained
TFP2000S-G1 -927-04	No declarable substances contained
TFP2000S-G1 -930-04	No declarable substances contained
TFP2000S-G1 -935-04	No declarable substances contained
TFP2000S-G1 -940-04	No declarable substances contained

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Flexessories: a complete set of aluminum channels with diffusers and lenses
- Drivers and dimmers: wide selection of OPTOTRONIC 24 V DALI, DMX and BLE

Product family datasheet

















Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction TEC Flex IP66
	Product Datasheet TEC Flex Shortpitch IP66 Product Datasheet (EN)
	Brochures Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certificates TFX ENEC 130520
	Declarations of conformity TECFlex CE 4210017 300420
	CAD data DWG TEC Flex and TEC Flex Shortpitch
	Eulumdat TFP2000S G1 827 LDT 291121
	Eulumdat TFP2000S-G1-827 LTD 130122
	IES data TFP2000S G1 827 IES 291121
	IES data TFP2000S-G1-827 IES 130122
	Eulumdat TFP2000S G1 830 LDT 291121
	Eulumdat TFP2000S-G1-830 LTD 130122
	IES data TFP2000S G1 830 IES 291121
	IES data TFP2000S-G1-830 IES 130122
	Eulumdat TFP2000S G1 840 LDT 291121
	Eulumdat TFP2000S-G1-840 LTD 130122

Product family datasheet

	IES data TFP2000S G1 840 IES 291121
	IES data TFP2000S-G1-840 IES 130122
	Eulumdat TFP2000S G1 850 LDT 291121
	Eulumdat TFP2000S-G1-850 LTD 130122
	IES data TFP2000S G1 850 IES 291121
	IES data TFP2000S-G1-850 IES 130122
	Eulumdat TFP2000S G1 865 LDT 291121
	Eulumdat TFP2000S-G1-865 LTD 130122
	IES data TFP2000S G1 865 IES 291121
	IES data TFP2000S-G1-865 IES 130122
	Eulumdat TFP2000S-G1-927 LTD 130122
	IES data TFP2000S-G1-927 IES 130122
	Eulumdat TFP2000S-G1-930 LTD 130122
	IES data TFP2000S-G1-930 IES 130122
	Eulumdat TFP2000S-G1-935 LTD 130122
	IES data TFP2000S-G1-935 IES 130122
	Eulumdat TFP2000S-G1-940 LTD 130122
	IES data TFP2000S-G1-940 IES 130122

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172134576	TFP2000S-G1 -827-05	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3754.00 g
4062172134590	TFP2000S-G1 -830-05	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3754.00 g
4062172134613	TFP2000S-G1 -840-05	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3754.00 g
4062172134637	TFP2000S-G1 -850-05	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3754.00 g
4062172134651	TFP2000S-G1 -865-05	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3754.00 g
4062172268684	TFP2000S-G1 -927-04	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3244.00 g
4062172268707	TFP2000S-G1 -930-04	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3244.00 g
4062172268721	TFP2000S-G1 -935-04	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3244.00 g
4062172268745	TFP2000S-G1 -940-04	Shipping carton box 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3244.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product family datasheet

Accessories Optional

Product description	Accessory name	Accessory code
TFP2000S-G1 -827-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -827-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -827-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -827-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -827-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -827-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -827-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -827-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -827-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -827-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -827-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -827-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -827-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -827-05	FX -SC08-G2-C2PF-IP54-0500	▶ 4052899464889
TFP2000S-G1 -827-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -827-05	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -827-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -830-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -830-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -830-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -830-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -830-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -830-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -830-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -830-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -830-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -830-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -830-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -830-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -830-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -830-05	FX -SC08-G2-C2PF-IP54-0500	▶ 4052899464889
TFP2000S-G1 -830-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -830-05	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -830-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -840-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -840-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300

Product family datasheet

TFP2000S-G1 -840-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -840-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -840-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -840-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -840-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -840-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -840-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -840-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -840-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -840-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -840-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -840-05	FX -SC08-G2-C2PF-IP54-0500	▶ 4052899464889
TFP2000S-G1 -840-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -840-05	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -840-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -850-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -850-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -850-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -850-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -850-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -850-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -850-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -850-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -850-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -850-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -850-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -850-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -850-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -850-05	FX -SC08-G2-C2PF-IP54-0500	▶ 4052899464889
TFP2000S-G1 -850-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -850-05	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -850-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -865-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -865-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -865-05	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -865-05	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -865-05	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -865-05	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827

Product family datasheet

TFP2000S-G1 -865-05	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -865-05	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -865-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -865-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -865-05	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -865-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -865-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -865-05	FX -SC08-G2-C2PF-IP54-0500	▶ 4052899464889
TFP2000S-G1 -865-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -865-05	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -865-05	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -927-04	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -927-04	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -927-04	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -927-04	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -927-04	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -927-04	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -927-04	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -927-04	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -927-04	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -927-04	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -927-04	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -927-04	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -927-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -927-04	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -927-04	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -927-04	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -930-04	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -930-04	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -930-04	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -930-04	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -930-04	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -930-04	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -930-04	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -930-04	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -930-04	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -930-04	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -930-04	FX-QMS-G1 -TR19H16-300	▶ 4052899449008

Product family datasheet

TFP2000S-G1 -930-04	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -930-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -930-04	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -930-04	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -930-04	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -935-04	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -935-04	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -935-04	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -935-04	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -935-04	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -935-04	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -935-04	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -935-04	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -935-04	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -935-04	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -935-04	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -935-04	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -935-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -935-04	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -935-04	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -935-04	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046
TFP2000S-G1 -940-04	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000S-G1 -940-04	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000S-G1 -940-04	FX-QMS-G1 -T45D19H19-300	▶ 4052899448667
TFP2000S-G1 -940-04	FX-QMW-G1 -TU26H25W10-300	▶ 4052899448773
TFP2000S-G1 -940-04	FX-QMW-G1 -TU26H25-300	▶ 4052899448803
TFP2000S-G1 -940-04	FX-QMW-G1 -TK30D46H27-300	▶ 4052899448827
TFP2000S-G1 -940-04	FX-QMW-G1 -TU26H25W2-300	▶ 4052899448841
TFP2000S-G1 -940-04	FX-QMS-G1 -TU15H6-300	▶ 4052899448865
TFP2000S-G1 -940-04	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000S-G1 -940-04	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000S-G1 -940-04	FX-QMS-G1 -TR19H16-300	▶ 4052899449008
TFP2000S-G1 -940-04	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000S-G1 -940-04	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000S-G1 -940-04	FX -SC08-G2--BTJ-IP54	▶ 4052899568853
TFP2000S-G1 -940-04	FX-DCS -G1-GL-25	▶ 4052899452244
TFP2000S-G1 -940-04	FX-QMS-G1 -TU16H12LS-300	▶ 4052899449046

Product family datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.