

LEDDriving SL W21W/5W RED

Ideal replacement for any vehicle




Suitable for various vehicle exterior applications

Available in Red




Replaces conventional W21W5W lamps

Easy upgrade to LED technology with plug & play solutions



Reliable OSRAM quality stands for less lamp replacements

4-year OSRAM guarantee (refer to www.osram.com/am-guarantee for precise conditions)

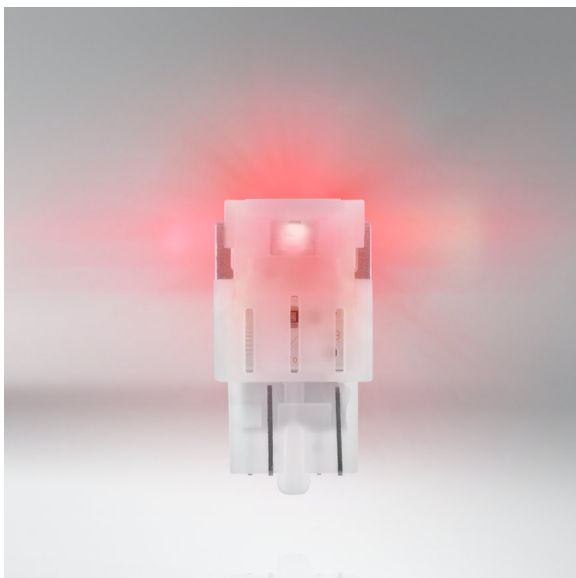

Suitable LED replacement for W21/5W

LEDDriving SL W21W/5W replacement lamps offer a modern and intense light. These replacement lamps are suitable for all conventional W21W/5W lamp bases. In comparison to standard lamps, these LED retrofit lamps use up to 80% less energy. OSRAM offers a 4 year guarantee for these LEDDriving SL lamps. These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Product family datasheet

Technical data

| Product description | Product information | | | Electrical data | | |
|-------------------------------|---------------------|--|-------------------------------------|-----------------|-----------------|-----------------|
| | Order reference | Application (Category and Product specific) | Product type (off-road vs. on-road) | Power input | Nominal voltage | Nominal wattage |
| LEDriving SL $\hat{=}$ W21/5W | 7515DRP | Mainly used for signal/ indicator applications | Off-road $\hat{=}$ W21/5W | 2.4 W | 12.0 V | 1.70/0.40 W |

| Product description | Power input tolerance | Test voltage | Photometrical data | Dimensions & weight | | Lifespan | |
|-------------------------------|-----------------------|--------------|--------------------|---------------------|----------|-------------|-------------|
| | | | Luminous flux | Length | Diameter | Lifespan B3 | Lifespan Tc |
| LEDriving SL $\hat{=}$ W21/5W | ± 10 % | 13.5 V | 80/10 lm | 47.5 mm | 20.0 mm | 1500 h | 4000 h |




| Product description | Additional product data | Capabilities | Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|-------------------------------|-----------------------------|-------------------|--|----------------------------|
| | Base (standard designation) | Technology | Date of Declaration | Primary Article Identifier |
| LEDriving SL $\hat{=}$ W21/5W | W3x16q | LED ¹⁾ | 29-12-2021 | 4062172152280 |

| Product description | Candidate List Substance 1 | CAS No. of substance 1 | Safe Use Instruction | Declaration No. in SCIP database |
|-------------------------------|----------------------------|------------------------|--|--------------------------------------|
| LEDriving SL $\hat{=}$ W21/5W | Lead | 7439-92-1 | The identification of the Candidate List substance is sufficient to allow safe use of the article. | 74e3b067-f6b4-4a09-a2e0-2e0a6a46074e |

¹⁾ Light-emitting diode lamp

Product family datasheet

Download Data

| File | |
|---|--|
|  | Brochures LEDriving Retrofits - Exchange overview (EN) |
|  | Brochures 618438_LEDriving RETROFIT application overview (EN) |
|  | 360 Degree Image LEDriving SL W215W 7515DRP-02B |

Safety advice

Canbus compatible

Coloured lamps for usage behind coloured glass

Legal advice

These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.