

# TYREinflate 200




### Rapid Inflation Time

Inflate the tire to the desired pressure in ca. 4.5 minutes\*\*



### Wind-up Cable

Winding/unwinding mechanism for a neatly rolled up cable



### Including three-piece adaptor kit

To inflate bicycles, balls and other inflatables



### Rapid tyre inflator with wind-up cable

The OSRAM Tyreinflate 200 analogue tyre inflator inflates a 13" tyre from flat in up to 4.5 minutes\*\*. It has a large on/off button for easy use. Its stable design keeps the inflator still while in use. Powered from an in-car 12V socket, the Tyreinflate 200's long 3m power cable makes reaching all the tyres around the vehicles easier. Shows pressure readings in kPA, bar and PSI. Includes storage compartment for tyre valve caps when being used. Comes with three-piece adaptor set for use with bicycle tyres, motorcycle tyres, balls and other inflatables.\*\*based on inflating a 13" tyre from flat to 2.41 BAR

# Product datasheet

## Technical data

### Product information

Inflation time	4.5 min
Max Pressure	5.5 bar
Air Hose Length	50 cm
Power Cord Length	3.0 m
Display Size	50 mm
Measuring Units	PSI, kPa, bar
Accuracy (bar)	±0.1 bar
Flow rate (l/min)	tbc


### General Product Information

Global order reference	OTI200
------------------------	--------

### Electrical Data

Nominal wattage	120.00 W
Nominal voltage	11.1 V
Operating Voltage	12 V
Power Source	12 V Fused Plug

### Physical Attributes & Dimensions

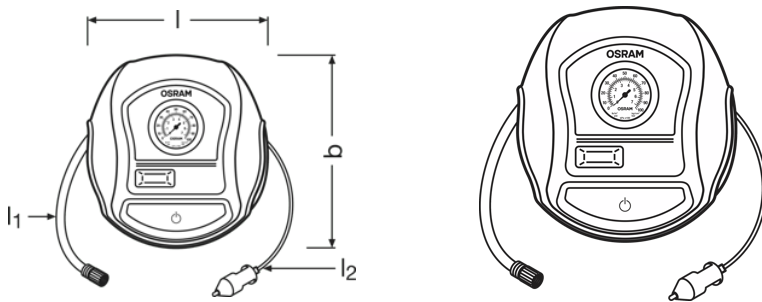

Length	197.0 mm
Width	79.0 mm
Height	180.0 mm

### Operating Conditions

Noise Level (dB)	90 dB
------------------	-------

## Product datasheet

### Additional product data

Display Type	Analogue
Recommended to Use With	Car, Bicycle

### Capabilities

Accessories	Adaptors for: Balls, Air Mattress, Bikes
Fuse	10 A

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of declaration	05-09-2024
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	2c7125da-b121-4f3d-8c54-1fc45a571265 91681add-0e23-41d1-a9d2-68596b3c0670



ref\_pim\_amsproductinfographic  
S



ref\_pim\_amsproductinfographic  
S



ref\_pim\_amsproductinfographic  
S

## Product datasheet


### Intuitive to use



### Easy to use



### Faster Inflation Get going quicker



Inflate a 13" tyre from flat to 30psi / 2.1 BAR in 4.5mins

ref\_pim\_amsproductinfographic  
s

ref\_pim\_amsproductinfographic  
s

ref\_pim\_amsproductinfographic  
s

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899620209	TYRE inflate 200	Folding carton box 1	186 mm x 83 mm x 203 mm	3.13 dm <sup>3</sup>	790.00 g
4062172166515	TYRE inflate 200	Shipping carton box 4	351 mm x 206 mm x 238 mm	17.21 dm <sup>3</sup>	3462.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Download Data

File	
	User instruction TYREinflate 200
	Movie application TyreInflate How to Video (RU)
	Product movie TyreInflate 200 Product Video (EN)
	Product movie TyreInflate How to Video (EN)
	Product movie TyreInflate How to Video (IT)
	Video OSRAM TYREinflate 200: Rapid tyre inflator with wind-up cable
	Video OSRAM TYREinflate How To: Change your vehicle's tyre pressure easily

## Product datasheet

### Safety advice

Product won't exceed noise levels of more than 90 dB

### Legal advice

CE and EAC compliant

\* for precise conditions please refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

\*\* based on inflating a 13" tyre from flat to 2.41 BAR

Application advice:  
For more detailed application information and graphics please see product datasheet.

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

### Application advice

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.