

FX-DCS -G1-EHS-KIT20

LINEARlight Flex DIFFUSE IP67 connector | Accessories for Flexible LED strips



Product family features

- Quick and easy installation
- Compatible with Linearlight Flex
- Compatible with TEC Flex


Product family benefits

- Simple installation, no tools or soldering required (CONNECTsystem)
- Reduced installation time (CONNECTsystem)
- Can be connected to the front of the module or at division points (CONNECTsystem)
- Low profile (CONNECTsystem)

Product datasheet

Technical data

Dimensions & weight

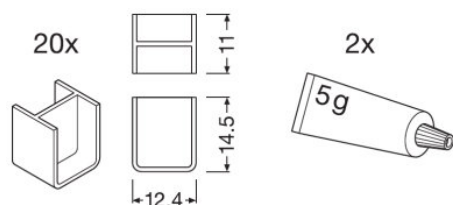

Product weight	51.40 g
Length	11.0 mm
Width	12.4 mm
Height	14.5 mm



Logistical data

Commodity code	392690979000
----------------	--------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	12-02-2022
Primary Article Identifier	4052899452206
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Download Data

File	
	User instruction LINEARLIGHT Flex Diffuse Installation Guide - Naed Version (EN)
	Brochures Light is freedom of design (EN)

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899452206	FX-DCS -G1-EHS-KIT20	Shipping carton box 10	200 mm x 200 mm x 110 mm	4.40 dm ³	664.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.