

BATTERYcharge 7PIN | 1PHASE | 32 AMP

Charging Cable for electric and plug-in hybrid vehicles



Type 2 to Type 2

Charge at home and on the move
Type 2 to Type 25PIN |
1PHASE




32 Ampere

Connects to any charging
unit or station with a 32A (1
Phase) type 2 connection



7.2 kWh

Charge your 60kW battery in
ca. 8 hours



5m cable length

Ergonomic handles for optimal
handling and a cable length of
5 meters



Drive with OSRAM into a more emission-free future

Discover the world of electric driving with OSRAM. Charge your fully electric or plug in hybrid type 2 vehicle from any 32A (1 phase) charging unit or station fitted with a type 2 connection point. The charging cable is equipped with ergonomic handles for optimal handling and has a cable length of 5 meters. It is suitable for use at public charging stations and at home. In addition, the charging cables are equipped with dust protection caps and tested for water resistance according to IP65 and shock resistance according to IK10. Even when connected, the electrical contact points are protected against the ingress of dust and splash water in accordance with IP65 and IK10. The scope of delivery also includes a durable, compact storage bag to neatly store the cable after charging. In addition, the product is TÜV and CE certified and comes with a 2-year guarantee*

Technical data


Product information

| | |
|-----------------------------|----------|
| Order reference | OCC23205 |
| Storage Case | Yes |
| Number Of Phases | 1 |
| Vehicle Charger Type | Type2 |
| Charging Point Charger Type | Type2 |

Electrical data

| | |
|-----------------|--------|
| Nominal wattage | 7200 W |
| Nominal voltage | 240 V |
| Nominal current | 32 A |

Dimensions & weight

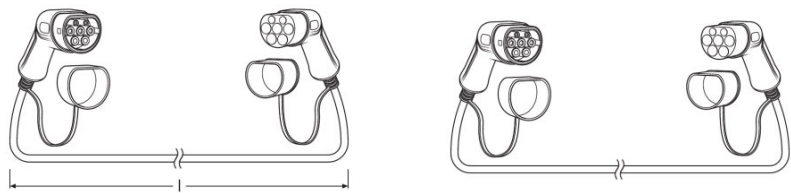

| | |
|--------|---------|
| Length | 5000 mm |
| Width | 700 mm |
| Height | 1200 mm |

Lifespan

| | |
|-----------|---------|
| Guarantee | 2 years |
|-----------|---------|

Additional product data

| | |
|-----------------------|------------|
| Operating Temperature | -40 +80 °C |
|-----------------------|------------|

Certificates & standards

| | |
|--------------------|--------|
| Standards | TÜV/CE |
| Type of protection | IP65 |
| IK Class | IK10 |

Country specific categorizations

| | |
|-----------------|----------|
| Order reference | OCC23205 |
|-----------------|----------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
|---|------------------------------------|
| Date of Declaration | 07-03-2024 |
| Primary Article Identifier | 4052899624122 |
| Candidate List Substance 1 | No declarable substances contained |
| Declaration No. in SCIP database | No declarable substances contained |

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---|---------------------------------|---|-----------------------|--------------|
| 4052899624122 | BATTERY charge 7PIN 1PHASE 32 AMP | Sleeves 1 | 340 mm x 200 mm x 108 mm | 7.34 dm ³ | 2450.00 g |
| 4052899624191 | BATTERY charge 7PIN 1PHASE 32 AMP | Shipping carton box 4 | 496 mm x 406 mm x 387 mm | 77.93 dm ³ | 12470.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction.

*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

