



# STARTERcable 150A

**Up to 150A peak amps**

For transferring the charging current to start even almost completely discharged batteries

**Up to 1.6 liters**

Suitable for starting vehicles with a petrol engine with capacity up to 1.6L

**2-year OSRAM Guarantee\***

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

**Classic starter cables from OSRAM**

With a range of OSRAM starter cables, motorcycle, car, commercial vehicle and truck drivers now have a quick and easy solution to rapidly transfer the battery power between a donor and a receiver vehicle and thus become ready to drive again. The OSRAM BATTERYstart STARTER CABLE 150A is a high-quality starter cable designed for professional and private use. The cables are made of copper coated aluminum which reduces the resistance of the cable and allows a constant and effective transmission of the charge. The starter cable has a length of 2.5 meters with a cross-sectional area of 6mm<sup>2</sup>. Thanks to the length and the cross-sectional area, it is possible to start vehicles with petrol engines with up to 1.6 liters of displacement, as a peak current strength of up to 150A can be achieved, at the same time a continuous current strength of 75 amps is given. It is suitable for voltages of 6V and 12V. To prevent high wear and tear, the OSRAM BATTERYstart STARTER CABLE 150A is sheathed in flexible yet durable PVC, and the insulated terminals provide additional safety and durability. The different colors of the cables and the handles on the terminals reduce the risk of mixing up the positive and negative terminals and thus the risk of incorrect connection to the battery. The storage bag included in the scope of delivery allows the cables to be stored tidy and, in a space-saving manner. Conveniently, the operating instructions are also attached to the back of the storage bag and are thus quickly at hand. OSRAM offers a 2-year guarantee\* on this product.

# Product datasheet

## Technical data


### Product information

|             |        |
|-------------|--------|
| Engine type | Petrol |
|-------------|--------|

### Electrical data

|                       |      |
|-----------------------|------|
| Peak Amps             | 150A |
| Continuous amp rating | 75 A |

### Dimensions & weight

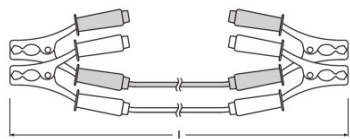

|                    |                   |
|--------------------|-------------------|
| Length             | 2550 mm           |
| Width              | 135 mm            |
| Height             | 600 mm            |
| Cable length       | 25m               |
| Cross section area | 6 mm <sup>2</sup> |
| Engine size        | ≤ 1.6L            |

### Colors & materials

|          |                        |
|----------|------------------------|
| Material | Copper Coated Aluminum |
|----------|------------------------|

### Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |               |
|---|---------------|
| Date of Declaration   | 07-03-2024    |
| Primary Article Identifier  | 4062172220835 |
| Declaration No. in SCIP database                                      | In work       |

## Logistical Data

Product datasheet

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume                | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4062172220835 | STARTERcable 150A   | Bag<br>1                        | 250 mm x 250 mm x<br>60 mm              | 3.75 dm <sup>3</sup>  | 2788.00 g    |
| 4062172220842 | STARTERcable 150A   | Shipping carton box<br>4        | 270 mm x 230 mm x<br>270 mm             | 16.77 dm <sup>3</sup> | 3142.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Legal advice

\*for precise conditions please refer to:

[www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

Application advice: For more detailed application information and graphics please see product datasheet and user manual.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

