


STARTERcable 700A



Up to 700A peak amps

For transferring the charging current to start even almost completely discharged batteries




Up to 5.5 liters

Suitable for starting vehicles with a petrol or diesel engine with a capacity of up to 5.5L



350A Continuous amp rating

For permanent current transmission and protection against overheating, a continuous amp rating of 350A is given



2-year OSRAM Guarantee*

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.



Classic starter cables from OSRAM

With a range of OSRAM starter cables, motorcycle, car, commercial vehicle and truck drivers now have a quick and easy solution to rapidly transfer the battery power between a donor and a receiver vehicle and thus become ready to drive again. The OSRAM BATTERYstart STARTER CABLE 700A is a high quality starter cable designed for professional and private use. The cables are made of copper coated aluminum which reduces the resistance of the cable and allows a constant and effective transmission of the charge. The starter cable has a length of 3.5 meters with a cross-sectional area of 25mm². Thanks to the length and the cross-sectional area, it is possible to start vehicles with petrol and diesel engines with up to 5.5 liters of displacement, as a peak current strength of up to 700A can be achieved, at the same time a continuous amp rating of 350A is given. It is suitable for voltages of 12V and 24V. To prevent high wear and tear, the OSRAM BATTERYstart STARTER CABLE 700A is sheathed in flexible yet durable PVC, the insulated clamps and handles provide additional safety and durability. The different colors of the cables and the handles on the clamps reduce the risk of mixing up the positive and negative terminals and thus the risk of incorrect connection to the battery. The storage bag included in the scope of delivery allows the cables to be stored tidy and, in a space-saving manner. Conveniently, the operating instructions are also attached to the back of the storage bag and are thus quickly at hand. OSRAM offers a 2-year guarantee* on this product.

Product datasheet

Technical data


Product information

| | |
|-------------|-----------------|
| Engine type | Diesel / Petrol |
|-------------|-----------------|

Electrical Data

| | |
|-----------------------|-------|
| Peak Amps | 700A |
| Continuous amp rating | 350 A |

Physical Attributes & Dimensions

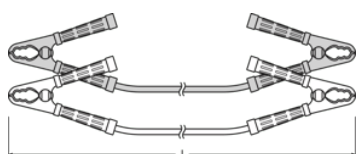

| | |
|--------|----------|
| Length | 300.0 mm |
| Width | 200 mm |
| Height | 90.0 mm |

Dimensions & weight

| | |
|--------------------|--------------------|
| Cross section area | 25 mm ² |
| Engine size | ≤ 5.5L |

Colors & materials

| | |
|----------|------------------------|
| Material | Copper Coated Aluminum |
|----------|------------------------|

Environmental & Regulatory Information

| | |
|---|------------------------------------|
| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) | |
| Candidate list substance 1 | No declarable substances contained |
| Declaration no. in SCIP database | No declarable substances contained |

Logistical Data

Product datasheet

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4062172220910 | STARTERcable 700A | Bag 1 | 250 mm x 250 mm x 60 mm | 3.75 dm ³ | 7523.00 g |
| 4062172220927 | STARTERcable 700A | Shipping carton box 4 | 270 mm x 230 mm x 270 mm | 16.77 dm ³ | 7877.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Legal advice

*for precise conditions please refer to:

www.osram.com/am-guarantee Application advice: For more detailed application information and graphics please see product datasheet and user manual.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

