

BackLED CP G5 - Mounting profile

– Mounting profiles



Product family features

- Overall length available 2 m
- Compatible with BackLED G5 family
- Suitable for BA-TW-CP-G5/BA-XL-CP-G5/ BA-L-CP-G5/BA-M-HO-CP-G5/BA-M-CP-G5/BA-M-CP-G5-HF/ BA-S-CP-G5

Product family benefits

- Can be easily shortened to any length
- Quick and simple snap-in fixing of the LED modules, no tools required
- Robust aluminum profile
- Quick and easy mounting of the profile with self-tapping screws or pop rivets
- Quick and simple snap-in fixing the cables of the LED modules, no tools required

Areas of application

- Suitable for BA-TW-CP-G5, BA-XL-CP-G5, BA-L-CP-G5, BA-M-HO-CP-G5 , BA-M-CP-G5, BA-M-CP-G5-HF, BA-S-CP-G5


Product family datasheet

Technical data


Dimensions & weight

Product description	Product weight	Length	Height	Width
BA -MP-L-G5-2M	21450 g	2000 mm	89 mm	200 mm
BA -MP-SM-G5-2M	17940 g	2000 mm	81 mm	144 mm

Product line drawing

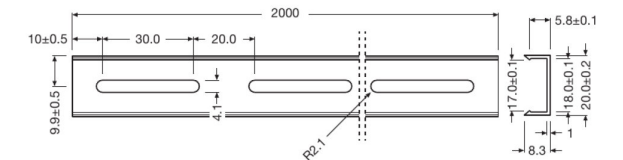

BA -MP-L-G5-2M

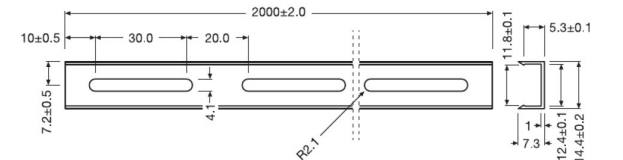

BA -MP-SM-G5-2M

Logistical data

Product description	Commodity code
BA -MP-L-G5-2M	76169990990
BA -MP-SM-G5-2M	76169990990

Product family datasheet

Environmental information
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
BA -MP-L-G5-2M	27-01-2022	4052899629189	No declarable substances contained
BA -MP-SM-G5-2M	27-01-2022	4052899629196	No declarable substances contained

Product description	Declaration No. in SCIP database
BA -MP-L-G5-2M	No declarable substances contained
BA -MP-SM-G5-2M	No declarable substances contained

Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Product family datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899629189	BA -MP-L-G5-2M	Shipping carton box 50	2060 mm x 165 mm x 88 mm	29.91 dm ³	11550.00 g
4052899629196	BA -MP-SM-G5-2M	Shipping carton box 50	2060 mm x 125 mm x 88 mm	22.66 dm ³	9645.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.