

QUICKTRONIC® PROFESSIONAL QTP8 for T8-fluorescent lamps



QTP8 1x18, 36, 58



QTP8 2x18, 36, 58



QTP8 3x/4x18

Your advantages:

- 100,000 hours lifetime*
- $t_c = 75^\circ\text{C}$
- Preheat start within 2 seconds
- Constant luminous flux between $U_N = 198\text{V} \dots 264\text{V}$
- Flickerfree HF light
- Reliable lamp ignition in between $t_a = -25^\circ\text{C} \dots +55^\circ\text{C}$
- Suitable for luminaires of PC I and II
- $\text{EEI} = \text{A2}$
- Automatic safety shut down at lamp failure
- Automatic restart after lamp replacement
- Suitable for emergency lighting (DC operation, 0 Hz)
- CW terminals for manual and robot wiring

* For $t = 65^\circ\text{C}$ at t_c ; max. failure rate of 10 %

QUICKTRONIC® PROFESSIONAL QTP8

The industry ECG from OSRAM.


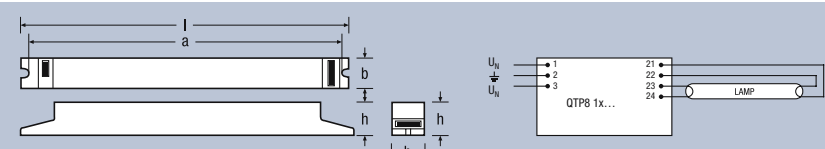
TRIED
AND TRUSTED
MILLIONS OF
TIMES

SEE THE WORLD IN A NEW LIGHT

OSRAM



TECHNICAL DATA


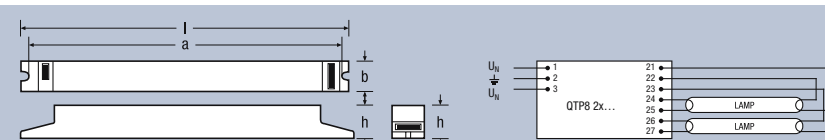



For PC I luminaires: Earthing via ECG casing required by means of serrated edge washer (as per EN 60598)
For PC II luminaires: No earthing required

Type	Product number																
------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

QUICKTRONIC® PROFESSIONAL for T8-lamps – single-lamp application

QTP8 1x18/230-240	4008321131584	1xL 18	198...264	154...276	>45	0.09	0.97	19	16	1300	-25...+55	360	30	30	350	20	270
QTP8 1x36/230-240	4008321131621	1xL 36 (L 38)	198...264	154...276	>45	0.16	0.96	35	32	3200	-25...+55	360	30	30	350	20	270
QTP8 1x58/230-240	4008321131669	1xL 58	198...264	154...276	>45	0.25	0.98	55	50	5000	-25...+55	360	30	30	350	20	310


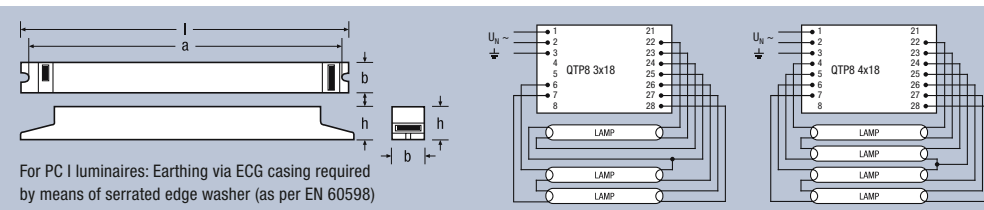
For PC I luminaires: Earthing via ECG casing required by means of serrated edge washer (as per EN 60598)
For PC II luminaires: No earthing required

Type	Product number																
------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

QUICKTRONIC® PROFESSIONAL for T8-lamps – double-lamp application

QTP8 2x18/230-240	4008321131607	2xL 18	198...264	154...276	>45	0.17	0.97	35	32	2x1300	-25...+55	423	30	30	415	20	415
QTP8 2x36/230-240	4008321131645	2xL 36 (L 38)	198...264	154...276	>45	0.31	0.98	71	64	2x3200	-25...+55	423	30	30	415	20	415
QTP8 2x58/230-240	4008321131683	2xL 58	198...264	154...276	>45	0.45	0.98	110	100	2x5000	-25...+55	423	30	30	415	20	415

Suitable for master/slave circuits in damp-proof luminaires.

For PC I luminaires: Earthing via ECG casing required by means of serrated edge washer (as per EN 60598)
For PC II luminaires: No earthing required

Type	Product number																
------	----------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

QUICKTRONIC® PROFESSIONAL for T8-lamps – 3- and 4-lamp application

QTP8 3x/4x18/230-240	4008321131706	3xL 18	198...264	154...276	43	0.26	0.99	56	48	3x1300	-25...+55	423	40	30	415	20	490
		4xL 18				0.32		73	64	4x1300							



OSRAM System* Guarantee

If OSRAM ECGs and LUMILUX® fluorescent lamps are used together (selected series or types), OSRAM offers a full five-year guarantee on the QUICKTRONIC® electronic control gears and a three-year guarantee on the LUMILUX® fluorescent lamps. For the System* Guarantee the lighting system must be registered with OSRAM. For terms and conditions and information on registration go to www.osram.com/system-guarantee.

SEE THE WORLD IN A NEW LIGHT

