

# Product Information

## SUPERSTAR CLASSIC B40 advanced frosted & clear sparkling



### Product Overview

Product	Wattage	CCT	lm	Base
SUPERSTAR CLASSIC B40 advanced frosted	6	2700	470	E14
SUPERSTAR CLASSIC B40 advanced clear sparkling	6	2700	470	E14

### Benefits

- For all household luminaires
- Low energy consumption and maintenance costs
- GLS inspired Design
- Dimmable<sup>1</sup>
- True 40W incandescent candle replacement
- Longer lifetime<sup>2</sup>

### Key Features

- 6W LED lamp as high-quality replacement for a 40W incandescent candle lamp
- Clear version with unique OSRAM patented optics
- Designed in Germany
- Available in 2700K warm white color temperature
- Energy efficiency class A+
- 20,000 hours lifetime<sup>3</sup>
- Similar dimensions as incandescent candle lamp
- UV and NIR radiation free
- Mercury free
- 4 years Osram Guarantee ([www.osram.com/guarantee](http://www.osram.com/guarantee))

Product	Wattage	CCT	lm	Base	Diameter	Length	Weight	EAN10	EAN40 (ship.unit)	Ship. unit
SUPERSTAR CLASSIC B40 advanced frosted	6	2700	470	E14	38 mm	105 mm	51 g	4052899904415	4052899904446	6
SUPERSTAR CLASSIC B40 advanced clear sparkling	6	2700	470	E14	38 mm	105 mm	53 g	4052899900899	4052899900967	6

<sup>1</sup>With many common dimmers, see also [www.osram.com/dim](http://www.osram.com/dim)

<sup>2</sup> Typical values. All the technical parameters apply to the entire lamp. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.


<sup>3</sup> The average lifetime of LED lamps is defined as the number of hours when the light output of 50% of a large group of identical lamps goes below 70% of its initial luminous flux (L70B50, IEC60969). The lifetime is estimated at room temperature (25°C), free air burning, base up burning position and at rated voltage.

# Product Information

## SUPERSTAR CLASSIC B40 advanced frosted & clear sparkling

### Common Characteristics<sup>3</sup>

Average lifetime <sup>4</sup>	Switching cycles (30s on, 30s off)	Casing material	Starting time	Warm up time for 60% light	Power factor
20,000 hrs	100,000	Plastic	< 0,2 s	0.0 s	0.84
Nominal current	Max. inrush current	Tc temperature max.5	CRI	Mercury max.	
32 mA	1 A	97 °C	80	0.0 mg	

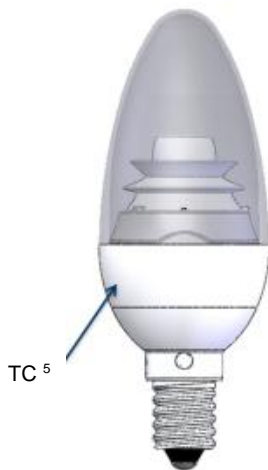

Good heat exchange supports ideal performance

### Disposal information

- Lamps with WEEE sign can be returned at specific collection points.
- LED lamps have to be disposed as special waste.



<sup>3</sup> Typical values. All the technical parameters apply to the entire lamp. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.

<sup>4</sup> The average lifetime of LED lamps is defined as the number of hours when the light output of 50% of a large group of identical lamps goes below 70% of its initial luminous flux (L70B50, IEC60969). The lifetime is estimated at room temperature (25°C), free air burning, base up burning position and at rated voltage.

<sup>5</sup> The Tc is defined as the highest permissible temperature which may occur on the outer surface of the LED lamp (in the indicated position) under normal operating conditions and at the rated voltage/current/power or the maximum of the rated voltage/current/power range (DIN EN 62031: 2009-01)

# Product Information

## SUPERSTAR CLASSIC B40 advanced frosted & clear sparkling

### Dimming behaviours<sup>6</sup>

Brand	Model	Power range	Voltage range	Leading or Trailing	Min dim range	Max dim range
Busch-Jaeger	6523U-LED	2-100	230	L	28,95%	95,3%
Legrand	775903	420	230	U	14,74%	100,0%
Ehmann	4660C0026	20-315	230	T	18,42%	100,0%
Berker	Nr.2874	20-250W	230V / 50Hz	T	15,26%	100,53%
Everflourish	EF0700DC	20~300W	230V/ 50Hz	T	0,00%	0,0%
Merten	5771-99	20~315W	230V/ 50Hz	T	26,32%	100,5%
Legrand	775903	420VA	230V/ 50Hz	T	15,26%	100,5%
OSRAM	MCU Te250	20~250W	220~240V/50~60Hz	T	6,84%	90,5%
PEHA	433HAB	20-315W	230V/ 50Hz	T	13,16%	100,0%
Busch	6519U	40-550W	230V /50Hz	T	0,00%	0,0%
CONRAD	T46	20~315W	230V/ 50Hz	T	20,00%	100,0%
GIRA	030700/I02		230V/ 50Hz	T	14,21%	102,1%
Busch-Dimmer	2247U	500W	230V/ 50Hz	L	0,00%	0,0%
BUSCH-Dimmer	6513U-102	40~420W	230V/ 50Hz	T	25,26%	102,1%
He	T46	20-315W	230V / 50Hz	T	21,05%	100,0%
EVERFLOURISH	EFM700DC	20-300W	230V / 50Hz	T	23,16%	100,0%
osram	mcu te 250	20-250W	230V / 50Hz	T	15,79%	99,5%
LUMEX Loadsmart	LT1D450LS Series	450W	200-240V/ 50Hz	\	3,16%	71,6%

#### Legend

L / leading edge      T / trailing edge

<sup>6</sup> Typical values The test results reflect the measurement of the individual devices that were used in tests. OSRAM does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions or when using successor models of the tested devices or different models of the same manufacturer.

The test results were achieved by using the above mentioned LED-lamp types. OSRAM does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions or when using other LED-lamp types.



# Product Information

## SUPERSTAR CLASSIC B40 advanced frosted & clear sparkling

### Application information

- Suitable for indoor application.
- For outdoor applications and operation in damp locations special approved fixture are required.
- Input voltage: 220-240V
- Storage temperature & humidity conditions (-20°C up to +40°C, at max. 95% relative humidity)
- Operating temperature & humidity conditions (-20°C up to +40°C, at max. 95% relative humidity)

### Lamp conformity

- 2004/108/EC Electromagnetic compatibility (EMC)
- 244/2009 Ecodesign requirements for non-directional household lamps
- IEC/ PAS 62612 Self ballasted LED-lamps for general lighting services – Performance requirements
- 2009/125/EC Ecodesign requirements for energy related products
- 2011/65/EC Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
- 1907/2006 Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH Regulation)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)
- EN 62471 Photobiological safety of lamps and lamp systems
- EN 55015 Limits and methods of measurement of radio disturbance
- EN 61000-3-2 Electromagnetic compatibility – Limits for harmonic current emission
- EN 61000-3-3 Electromagnetic compatibility – Limitation of voltage changes, voltage fluctuations, flicker in public low voltage supply systems
- EN61547 Electromagnetic compatibility immunity requirements
- 1194/2012 Eco design requirement for directional lamps, light emitting diode lamps and related equipment (DIM II)
- IEC 62560 self-ballasted LED-lamps for general lighting services by voltage >50V – Safety specifications
- 874/2012/EU Energy labeling of electrical lamps and luminaires