

LINEARlight Rigid FINESSE – Accessories



Product family benefits

- Large set of accessories for installation
- Recessed kit for installation on false ceiling
- Wall arms for holding fixture in place
- Metal clip for surface installation
- Kit for pendant installation
- Indoor and outdoor jumper for daisy chain connection
- Indoor and outdoor power cable: 5 m
- Outdoor male and female terminals for ad hoc cabling




Product family datasheet

Technical data

Product description	Electrical data	Dimensions & weight				Logistical data
	Type of current	Length	Product weight	Height	Width	Commodity code
LR FINESSE DIY M/F IP68	DC	54 mm	85.00 g	14.0 mm	14 mm	85366990990
LR FINESSE IN CABLE 5m IP54	DC	5038 mm	326.00 g	9.0 mm	12.5 mm	85444290900
LR FINESSE IN CABLE 5m IP68	DC	5108 mm	447.00 g	14.0 mm	14 mm	85444290900
LR FINESSE JUMPER 0.5m IP68	DC	608 mm	274.00 g	14.0 mm	14 mm	85444290900
LR FINESSE JUMPER 1m IP54	DC	1079 mm	72.00 g	9.0 mm	12.5 mm	85444290900
LR FINESSE RECESSED KIT	DC	1600 mm	360.00 g	32 mm	62 mm	73269098900
LR FINESSE SUSPENSION KIT	DC	3000 mm	80.00 g	12.0 mm	12.0 mm	73269098900
LR FINESSE WALL ARMS	DC	320 mm	300.00 g	54 mm	25.0 mm	73269098900
LR FINESSE METAL CLIP	DC	30 mm	5.00 g	13.0 mm	20.0 mm	73269098900
LR FINESSE BAFFLE 620	DC	620 mm	168.50 g	56.8 mm	23.0 mm	73269098900
LR FINESSE BAFFLE 920	DC	920 mm	240.50 g	56.8 mm	23.0 mm	73269098900


Product description	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
LR FINESSE DIY M/F IP68	25-04-2022	4052899618169	No declarable substances contained	No declarable substances contained
LR FINESSE IN CABLE 5m IP54	19-01-2022	4052899618121	No declarable substances contained	No declarable substances contained
LR FINESSE IN CABLE 5m IP68	25-04-2022	4052899618138	No declarable substances contained	No declarable substances contained
LR FINESSE JUMPER 0.5m IP68	25-04-2022	4052899618152	No declarable substances contained	No declarable substances contained
LR FINESSE JUMPER 1m IP54	19-01-2022	4052899618145	No declarable substances contained	No declarable substances contained
LR FINESSE RECESSED KIT	25-04-2022	4052899618091	No declarable substances contained	No declarable substances contained
LR FINESSE SUSPENSION KIT	25-04-2022	4062172114493	No declarable substances contained	No declarable substances contained
LR FINESSE WALL ARMS	25-04-2022	4052899618084	No declarable substances contained	No declarable substances contained
LR FINESSE METAL CLIP	19-01-2022	4052899618107		In work
LR FINESSE BAFFLE 620	25-04-2022	4062172197274	No declarable substances contained	No declarable substances contained
LR FINESSE BAFFLE 920	25-04-2022	4062172197298	No declarable substances contained	No declarable substances contained




LR FINESSE DIY MF DRAW 171219



LR FINESSE DIY MF DRAW 171219

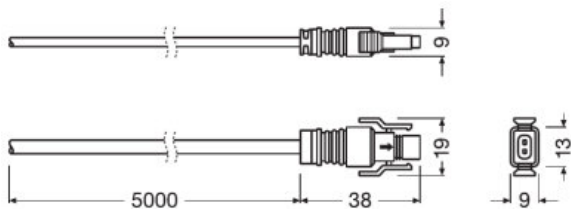

LR FINESSE IN CABLE 5M IP54 DRAW 171219

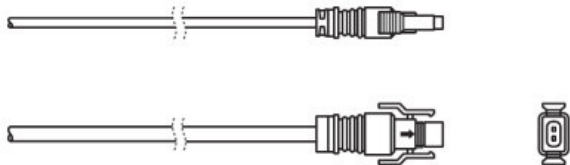


LR FINESSE IN CABLE 5M IP54 DRAW 171219




LR FINESSE IN CABLE 5M IP68 DRAW 171219




LR FINESSE IN CABLE 5M IP68 DRAW 171219




LR FINESSE JUMPER 0.5M IP68 DRAW 171219




LR FINESSE JUMPER 0.5M IP68 DRAW 171219

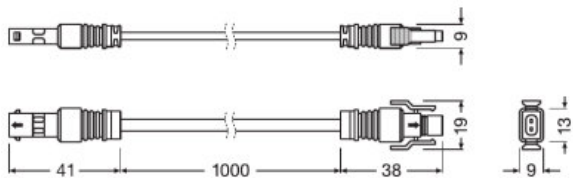


LR FINESSE IN JUMPER 1M IP54 DRAW 171219

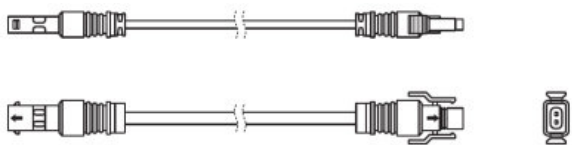

LR FINESSE IN JUMPER 1M IP54 DRAW 171219

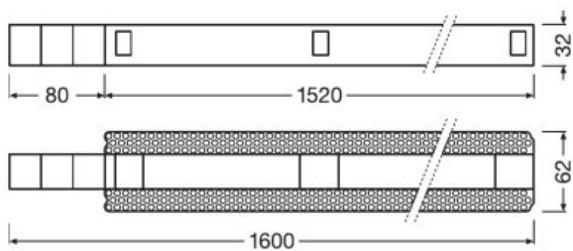


LR FINESSE RECESSED KIT DRAW 290120

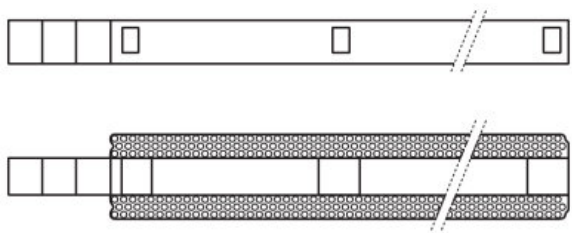

LR FINESSE RECESSED KIT DRAW 290120


Product family datasheet



LR FINESSE SUSPENSION KIT DRAW 171219




LR FINESSE SUSPENSION KIT DRAW 171219

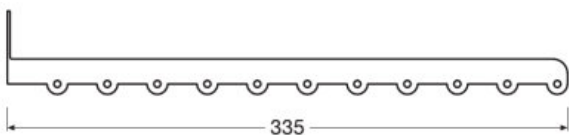


LR FINESSE Wall Arms DRAW 171219



LR FINESSE Wall Arms DRAW 171219

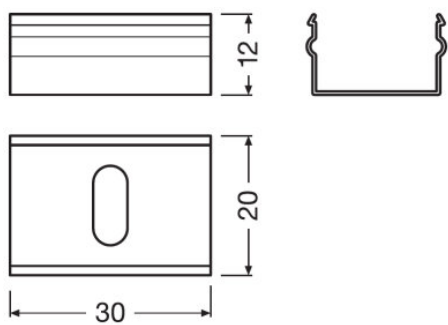


LR FINESSE Metal Clip

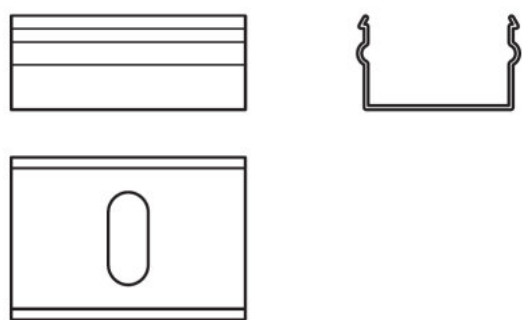


LR FINESSE Metal Clip


Product family datasheet

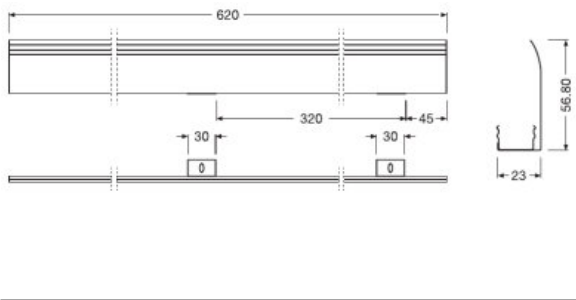


LR FINESSE BAFFLE 620 Line Drawing

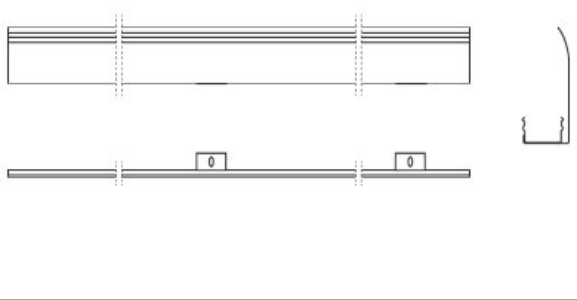

LR FINESSE BAFFLE 620 Line Drawing

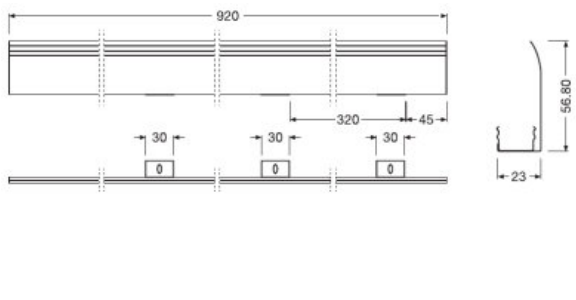

LR FINESSE BAFFLE 920 Line Drawing

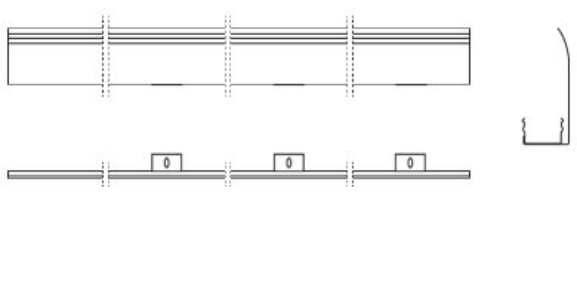

LR FINESSE BAFFLE 920 Line Drawing



Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction FINESSE
	User instruction FINESSE Recessed Kit

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899618169	LR FINESSE DIY M/F IP68	Shipping carton box 10	200 mm x 200 mm x 100 mm	4.00 dm ³	1010.00 g
4052899618121	LR FINESSE IN CABLE 5m IP54	Shipping carton box 4	230 mm x 130 mm x 160 mm	4.78 dm ³	2004.00 g
4052899618138	LR FINESSE IN CABLE 5m IP68	Shipping carton box 4	290 mm x 190 mm x 160 mm	8.82 dm ³	2060.00 g
4052899618152	LR FINESSE JUMPER 0.5m IP68	Shipping carton box 4	200 mm x 200 mm x 100 mm	4.00 dm ³	1220.00 g
4052899618145	LR FINESSE JUMPER 1m IP54	Shipping carton box 4	230 mm x 130 mm x 160 mm	4.78 dm ³	988.00 g
4052899618091	LR FINESSE RECESSED KIT	Shipping carton box 5	1652 mm x 192 mm x 37 mm	11.74 dm ³	2160.00 g
4062172114493	LR FINESSE SUSPENSION KIT	Shipping carton box 30	300 mm x 200 mm x 200 mm	12.00 dm ³	2642.00 g
4052899618084	LR FINESSE WALL ARMS	Shipping carton box 2	62 mm x 327 mm x 32 mm	0.65 dm ³	670.00 g
4052899618107	LR FINESSE METAL CLIP	Shipping carton box 100	180 mm x 130 mm x 120 mm	2.81 dm ³	580.00 g
4062172197274	LR FINESSE BAFFLE 620	Shipping carton box 5	665 mm x 94 mm x 84 mm	5.25 dm ³	983.00 g
4062172197298	LR FINESSE BAFFLE 920	Shipping carton box 5	964 mm x 94 mm x 84 mm	7.61 dm ³	1393.00 g

Product family datasheet

Logistical Data

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.