


PL-FLAT-AC-DA-G3 2500-840

PrevaLED Flat AC DA | Spot-, Down- and Wallmount Light Engines and Modules

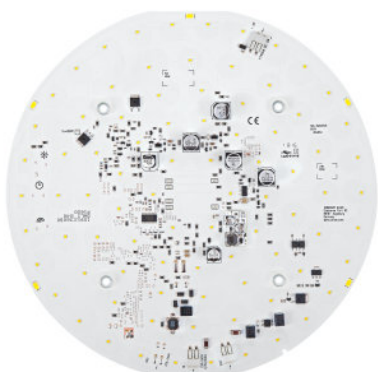

Product family features

- Dimming range (DALI): 1...100 %
- Dimensions of DALI version identical to on/off version
- Designed for wall and ceiling luminaires with diffuse light distribution
- Low-cost LED replacement of CFL wall-, and ceiling luminaires
- Driver integrated on LED board
- Available diameter: 170 mm, 240 mm, 335 mm, 415 mm
- Available with color temperature: 3,000 K or 4,000 K
- Available with luminous flux: 1,500 lm, 2,500 lm, 4,000 lm, 5,000 lm
- Lifetime (L70/B50): 50,000 h (temperature at $T_c = 80^\circ\text{C}$)
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1

Product family benefits

- Touch protection accessory for simple use in luminaires
- High reliability
- Easy to use
- Optimised design for simple thermal management
- Enables thin and efficient luminaire designs
- High quality of light thanks to low modulation
- 5 year guarantee



Areas of application

- Corridors
- Stairways
- Landings
- Hallways
- Emergency lighting for single battery systems
- Luminaires for emergency lighting with central battery according to IEC 60598-2-22

Technical data

Electrical data

Nominal voltage	230 V
Input voltage range	220...240 V
Type of current	AC
Input voltage DC	176...276 V
Inrush current	1,62 A ¹⁾
Max. ECG no. on circuit breaker 10 A (B)	93
Max. ECG no. on circuit breaker 16 A (B)	148
Input voltage AC	220...240 V
Mains frequency	0/50/60 Hz
Output PSTLM	≤1
Output SVM	≤0.9
On-mode power	19.00 W
Energy consumption in on-mode	19.0 kWh/1000h
Networked standby power	0.50 W
Displacement factor (cos φ1)	0.98

¹⁾ At 10 µs


Photometrical data

Luminous efficacy	128 lm/W
Color rendering index Ra	80
Light color (designation)	Neutral White
Correlated color temperature CCT	4000 K
Colour consistency (McAdam ellipses)	3
Useful luminous flux (Φ _{use})	2450 lm

Light technical data

Starting time	< 0.5 s
Warm-up time (60 %)	< 2.00 s
Beam angle	115 °

Dimensions & weight



Diameter	240.0 mm
Product weight	168.00 g
Height	14.6 mm
Length	240.0 mm
Width	235.0 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	75 °C
Maximum temperature at tc test point	90 °C
Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...85 °C

Lifespan

Number of switching cycles	100000
Lumen maintenance factor LMF	96
L70B50 lifetime	50000 h

Additional product data

Lighting technology used	LED
Predecessor EAN	4052899969728

Capabilities

Dimming range	1...100 %
Dimming interface	DALI
Dimmable	Only with specific dimmers

Programming

Product datasheet

Tuner4TRONIC	Yes
Tuner4TRONIC Field App	No

Certificates & standards

Standards	CE/ENEC/VDE
Type of protection	IP20
Energy efficiency class	E

Logistical data

Commodity code	85395100000
----------------	-------------

Environmental information




Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	21-07-2023
Primary Article Identifier	4062172203401
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	35094a43-e0fd-4564-b98c-8a45de1d049b

Additional product information

- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- Complies with IEC/EN 62031
- Complies with IEC/EN 61547
- Complies with IEC/EN 61000-3-2
- Complies with EN 55015, CISPR 15
- Complies with IEC/EN 62717
- Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- The LED module itself and all its components must not be stressed mechanically.
- For optimal cooling a thermal interface material should be applied between LED module and heat sink.
- The module must not be attached to wood or other flammable materials.
- Protect against splashes!
- The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
- For efficiency measurement, the product shall be set to a DALI dimming level of 100% by using Tuner4TRONIC. Refer to www.tuner4tronic.com.
- The product implemented control components are not designed for removal.

Product datasheet

Download Data

File	
	User instruction PrevaLED Flat AC DA
	Certificates PL FLAT AC G3 VDE ENEC 40040688 250723
	Declarations of conformity PL FLAT AC G3 CE 3798398 070623

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172203401	PL-FLAT-AC-DA-G3 2500-840	Shipping carton box 20	597 mm x 331 mm x 296 mm	58.49 dm ³	5148.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
PL-FLAT-AC-DA-G3 2500-840	PL-FLTP 240 G2	▶ 4052899969889

References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.