


## BA-AR-G1 900 540X270 TW

BackLED Area Tunable White | LED modules for light advertising and backlighting

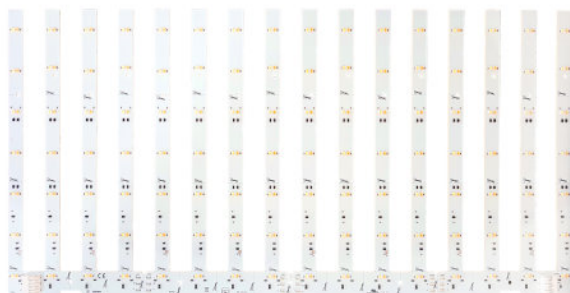

### Product family features

- 24 V constant voltage LED modules
- Tunable white 2700K-6500K for dynamic white applications
- Color rendering index  $R_a$  : > 90
- Constant LED pitch even at board interconnections
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or OSRAM BLE devices with OSRAM TW lamp profiles

### Product family benefits

- Provides homogenous light suitable for application in area luminaires
- Quick and easy mounting thanks to plastic holder
- Easy wiring with push-in connectors
- Low energy consumption and less heat generation
- Optimal operation on OPTOTRONIC 24VDC and 24VDC dimmable power supplies

### Areas of application

- Area lighting
- Light ceilings
- Hospitality, hotels, restaurants
- Individual and customized luminaires
- Daylight simulation



Technical data

Electrical data

Nominal voltage	24.0 V
Nominal wattage per LED module	17.6 W
Accidental reverse input voltage protection up to	25 V
Input voltage range	23...25 V
Type of current	DC
Rated wattage	17.60 W
Nominal wattage	17.60 W
Nominal current	0.00079 A

Photometrical data

Light color LED	Tunable White
Luminous efficacy	105 lm/W
Standard deviation of color matching	≤3 sdc <sub>m</sub>
Color temperature	2700 K
Color rendering index Ra	90
Luminous flux per LED module	925 lm
Luminous flux per LED module at T <sub>c</sub> 25 °C	925 lm
Nom. useful luminous flux 120°	120 lm
Rated useful luminous flux 120°	120 lm
Total useful luminous flux	925 lm



Light technical data

Starting time	< 1.0 s
Warm-up time (60 %)	< 2.00 s

LED module information

Number of LEDs per module	224
Minimum operable number of LED modules	1

Dimensions & weight

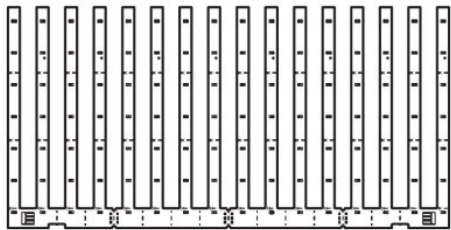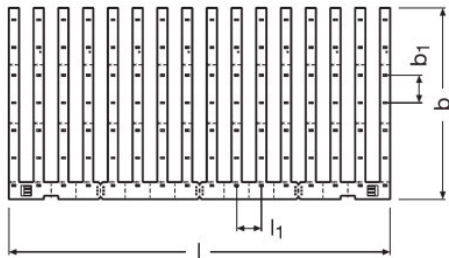

Product weight	188.00 g
Length	540.0 mm
Width	270.0 mm
Height	3.00 mm

Temperatures & operating conditions

Temperature range in operation at Tc point	-25...75 °C
Temperature range at storage	-30...80 °C
Performance temp. acc. to IEC 62717	40 °C

Lifespan

Number of switching cycles	30000
Lumen main.fact.at end of nom.life time	0.80
Nominal lamp life time	60000 h

Additional product data

ID of contained light source	LS_TRV_285799
------------------------------	---------------

Capabilities

Dimming range	1...100 %
---------------	-----------

Certificates & standards

Energy consumption	10 kWh/1000h
Type of protection	IP00
Standards	CE
Approval marks – approval	CE
Energy efficiency class of the contained light source	F

Product datasheet

Logistical data

Commodity code	85395100000
----------------	-------------





Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	31-05-2023
Primary Article Identifier	4062172141642
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Additional product information

- This product must be operated by a DALI DT8 power supply or OSRAM BLE devices in TW profile

Download Data

File	
	User instruction BackLED Area TW
	Brochures Technical application guide BackLED and BoxLED portfolio (EN)
	Eulumdat EULUMDAT BackLED AREA file
	IES data IES BackLED AREA file

# Product datasheet

## Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172141642	BA-AR-G1 900 540X270 TW	Shipping carton box 16	605 mm x 307 mm x 333 mm	61.85 dm <sup>3</sup>	4938.00 g

— The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Accessories Optional

Product description	Accessory name	Accessory code
BA-AR-G1 900 540X270 TW	BA -BAR 16PICS KIT	▶ 4062172197168

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.